






Übersicht / Contenu

 C50 Top Mount Glass Supporting System Page→ 04-07	 LED C50 Top Mount Glass Supporting System Page→ 08-11	 C50+ Top Mount Glass Supporting System Page→ 12-13	 A50 Top Mount Glass Supporting System Page→ 14-15
 U50 Top Mount Glass Supporting System Page→ 16-17	 U50F Top Mount Glass Supporting System Page→ 18-19	 U50Max Top Mount Glass Supporting System Page→ 20-21	 U50FMax Top Mount Glass Supporting System Page→ 22-23
 U50RMax Top Mount Glass Supporting System Page→ 24-25	 EX50 Top Mount Glass Supporting System Page→ 26-27	 X50 Top Mount Glass Supporting System Page→ 28-29	 N50S Top Mount Glass Supporting System Page→ 30-31
 N50 Top Mount Glass Supporting System Page→ 32-33	 N50F Top Mount Glass Supporting System Page→ 34-35	 N50R Side Fix System Page→ 36-37	 C70 Top Mount Supporting System with Glass Angle Adjustment Page→ 38-39
 C60 Top Mount Glass Supporting System Page→ 40-41	 A555 Top Mount Glass Supporting System Page→ 42-43	 R50Neo Top Mount Glass Supporting System Page→ 44-45	 FX50 Side Fix System Page→ 46-47
 NX50 Top Mount Glass Supporting System Page→ 48-49	 M50 F Type Top Mount Glass Supporting System Page→ 50-51	 CL50 Top Mount Glass Supporting System Page→ 52-53	 CL40 Top Mount Glass Supporting System Page→ 54-55
 DESIGN RX50 Top Mount Glass Supporting System Page→ 56-57	 CA50 In-Floor Glass Supporting System Page→ 58-61	 CX50 Top Mount Glass Supporting System Page→ 62-63	 D50 Side Mount Staircase Type Glass Railing Page→ 64-65

 D55 Bendable Side Fix Glass Railing System Page→ 66-67	 AL50 External Glass Supporting System Page→ 68-69	 S40 Top Mount Glass Supporting System (Economic Type) Page→ 70-71	 S40E Top Mount Glass Supporting System (Economic Type) Page→ 72-73
 J100 Juliete Balcony Page→ 74-75	 J120 Juliete Balcony Page→ 76-77	 Vista100 External Glass Supporting System Page→ 78-79	 Vista300 Vista310 Spigot System Page→ 80-81
 Vista320 Vista330 Spigot System Page→ 82-83	 TOP RAIL PROFILE VARIATIONS & ACCESSORIES Page→ 84-85	 HANDRAILS & ACCESSORIES Page→ 86-87	 ACCESSORIES Page→ 88



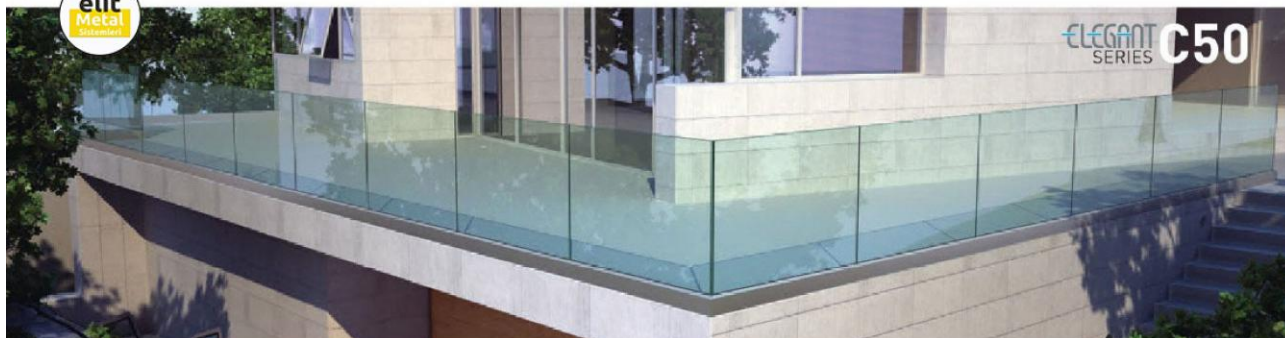



ELEGANT SERIES C50

System zur Befestigung auf dem Boden / Système Connecté Au Sol



C50

Mass/Block/Masse: 9.89846 kg
Volume/Volumen/Volume: 0.00517958 m³
Density/Dichte/Densité: 2700 kg/m³
Weight/Gewicht/Poids/Force: 13.7052 N



Alloy EN AW 6063
Stress and relocation results on 1m base profile with 1 tone (10.000 nT) horizontal load to the highest surface of the profile.

Belastungs- und Verlagerungsergebnisse auf 1 m Basis Profil bei Belastung mit 1 Tonne (10.000 NT), horizontale Belastung auf der höchsten Oberfläche des Profils.

EN AW 6063
Le stress et le démenagement résultant sur la surface la plus haute de profilé de base de 1 m à la suite d'une charge horizontale de 1000 kg.






Spirit Level
Integrierte Wasserablage
Niveau à bulle



Model Variations / Modelle / Options du modèle



Adjustable block option for not flat grounds
Einstellbares Gehäuse für unebene Böden
Option de bloc réglable pour un terrain accidenté

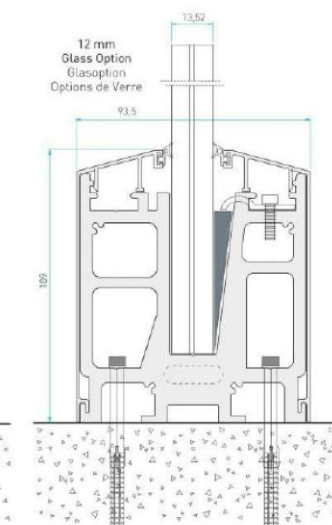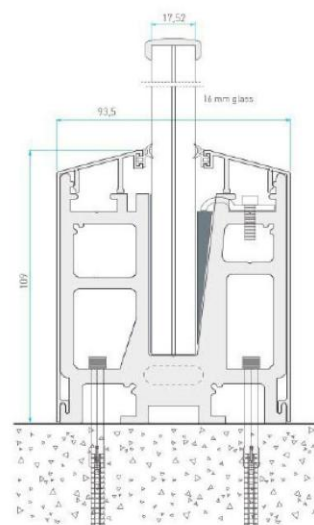



Glass Support Base Shoes



Full Length Base Channel Profile



Code	C50-5280	C50-5280/30	C50-6548	C50-6548/30	C50-6844	C50-6844/30	P-1001	P-1006
Length	15 cm	30 cm	15 cm	30 cm	15 cm	30 cm	200 cm	200 cm
Glass Thickness	12,4mm/ 13,52 mm Glass		16,4mm/ 17,52 mm Glass		20,4mm/ 21,52 mm Glass		12,4 / 17,52 mm Upon Request	20,4 / 21,52 mm Upon Request
Prefabricated	✓	✓	✓	✓	✓	✓	✓	✓
Plastic Wedge	Included	Included	Included	Included	Included	Included	X	X
Spacer	Included	Included	Included	Included	Included	Included	X	X
Wedge Locking	Included	Included	Included	Included	Included	Included	X	X

Covers



Endcaps



Gaskets

Glass Thickness	C50
10 mm	Interior Gasket CNT-029 Outer Gasket CNT-025
12 mm (13,76 mm)	Interior Gasket CNT-026 Outer Gasket CNT025
16 mm (17,52 mm)	Interior Gasket CNT025 Outer Gasket CNT-025
20 mm (21,52 mm)	Interior Gasket CNT-025 Outer Gasket CNT-025

• Epdm gaskets are sold on a box basis.


Fixing Components



C50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Alignment Profiles

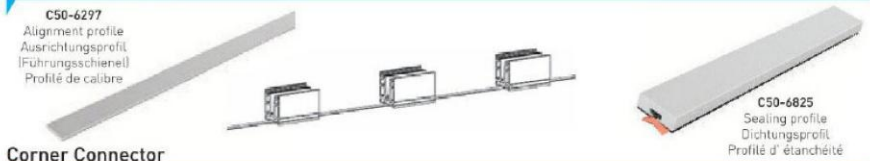


Corner Connector



Cover Merge Caps



Installation Details


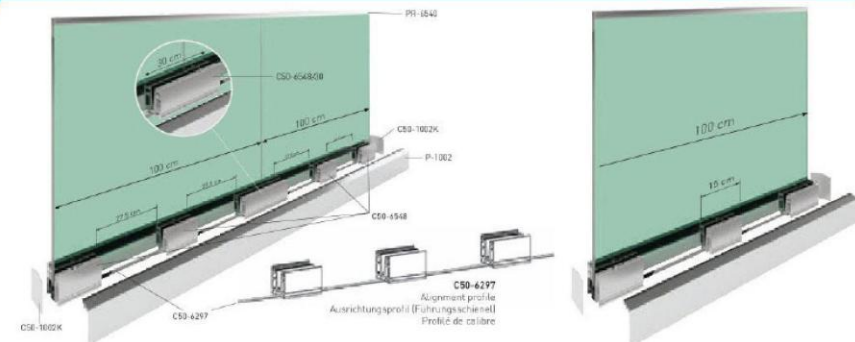




ELEGANT SERIES **C50::LED::**

C50::LED::

System zur Befestigung auf dem Boden
Système Connecté Au Sol

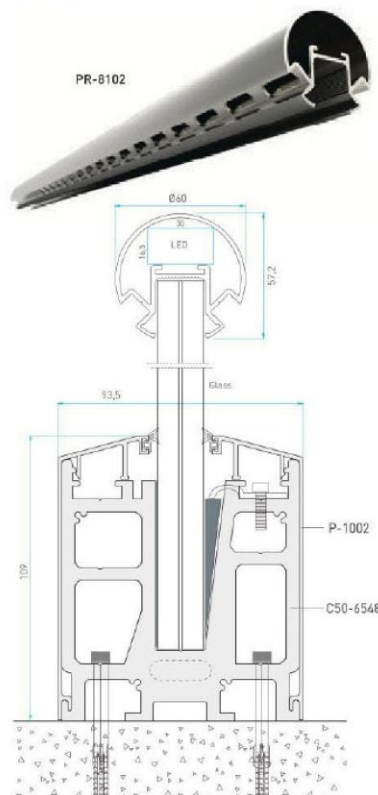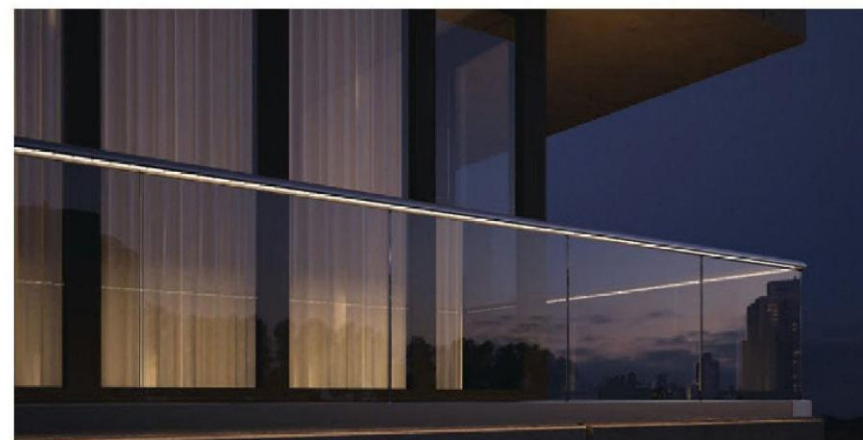

AK-8102D



AK-5190




AK-5189




AK-8102B



LED

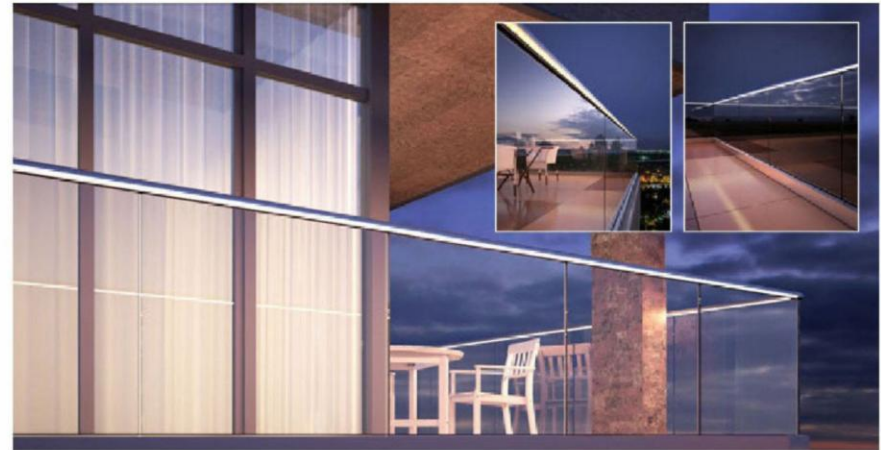


LED

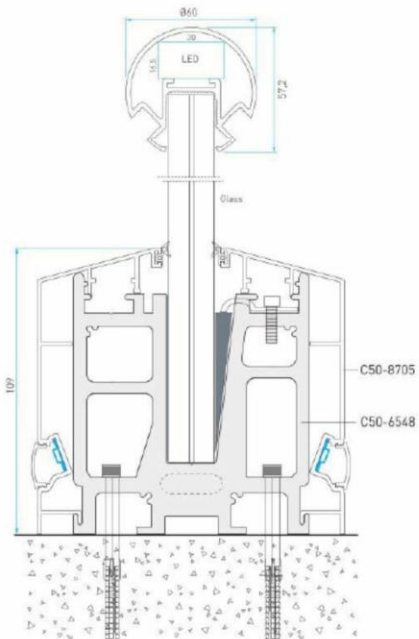

C50-8705





PR-9183

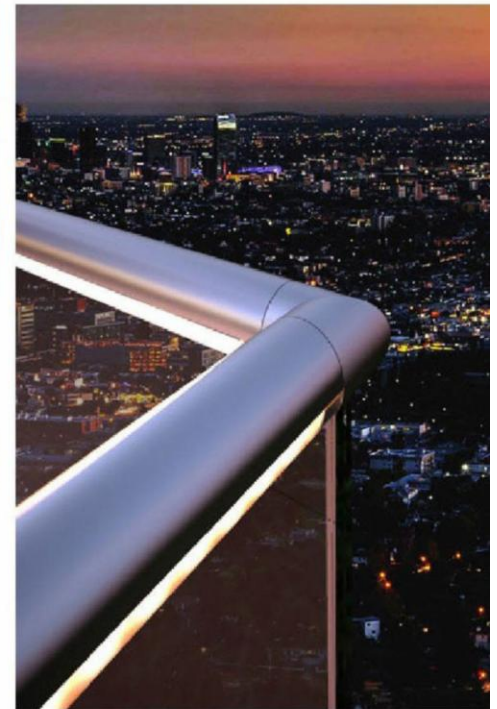



C50+

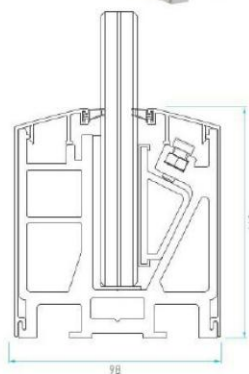


C50+

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes



C50P-1515



C50P-1515/30

Gaskets

Glass Thickness		C50+
10 mm	Interior Gasket	CNT-029
	Outer Gasket	CNT-025
12 mm (13,76 mm)	Interior Gasket	CNT-026
	Outer Gasket	CNT025
16 mm (17,52 mm)	Interior Gasket	CNT-025
	Outer Gasket	CNT-025
20 mm (21,52 mm)	Interior Gasket	CNT-025
	Outer Gasket	CNT-025

• Exim gaskets are sold on a box basis.

Full Length Base Channel Profile



P-1515
7,584 kg/m



C50P-KMS12 Wedge set for 6-6 mm Glass
C50P-KMS16 Wedge set for 8-8 mm Glass
C50P-KMS20 Wedge set for 10-10 mm Glass

Code	C50P-1515	C50P-1515/30	C50P-5396	C50P-5396/30
Length	15 cm	30 cm	15 cm	30 cm
Glass Thickness	12 mm / 12,4 mm / 13,52 mm / 16,4 mm / 17,52 mm		20 mm / 21,52 mm	
Prefabricated	✓	✓	✓	✓
Glass Fixing	Included	Included	Included	Included
Spacer	Included	Included	Included	Included

Covers



P-1002
0,710 kg/m



P-1003
0,680 kg/m



P-1004
0,770 kg/m



Endcaps



C50-1002K



C50-1003K



C50-1004K

Fixing Components



AK-5027K
Chemical Anchor



GJ10X150
M8 x 150 Threaded Rod
+ Washer + Nut






KB10X140





new

A50

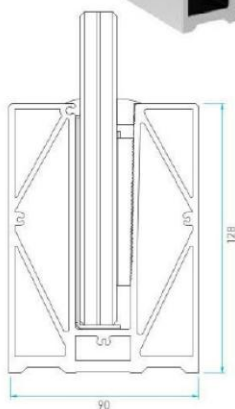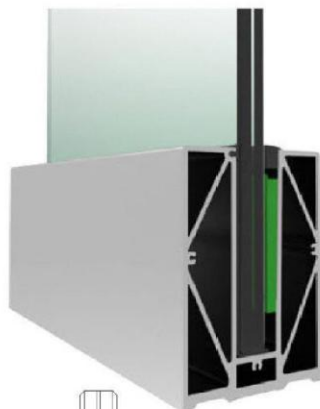


A50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile



P-1512
7,53 Kg/m



A50-KM12 (Wedge set for 6-6 mm Glass)
A50-KM16 (Wedge set for 8-8 mm Glass)
A50-KM20 (Wedge set for 10-10 mm Glass)

Code	P-1512
Length	500 cm
Weight	7,53 Kg/m
Finish	Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Endcap



A50-1512K

Gaskets



Glass Thickness		A50
12 mm (13,76 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-05
16 mm (17,52 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-01
20 mm (21,52 mm)	Interior Gasket	CNT-022
	Outer Gasket	CNT-01

* Epdm gaskets are sold on a box basis.



Fixing Components





AK-5027K
Chemical Anchor




GJ10X150
M10 x 150 Threaded Rod
+ Washer + Nut




AK-5299
Wedge Fixing Tool

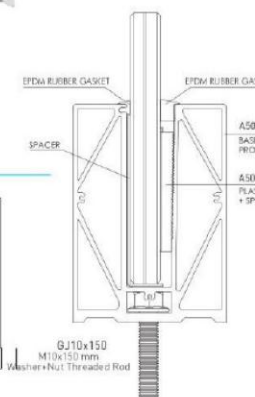



Installation Details

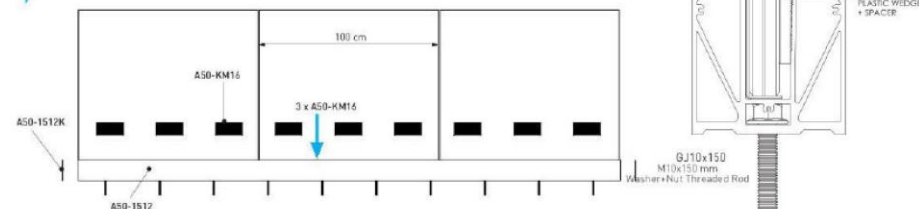

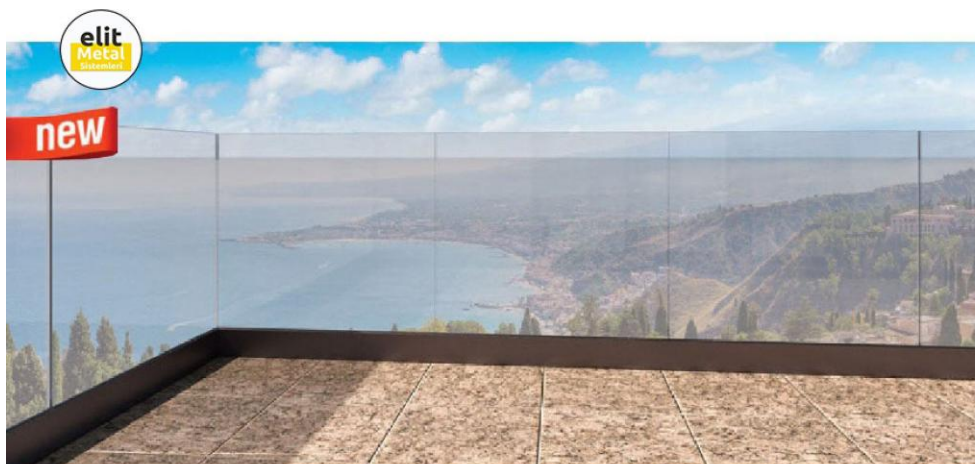


U50




U50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile

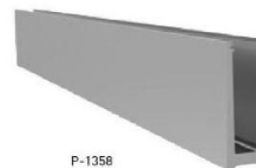

P-1358
5,83 Kg/m



U50-KM12 (Wedge set for 6+6 mm Glass)
U50-KM16 (Wedge set for 8+8 mm Glass)
U50-KM20 (Wedge set for 10+10 mm Glass)

Code	P-1358
Length	600 cm
Weight	5,83 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Gaskets




Glass Thickness		U50
16 mm (17,52 mm)	Interior Gasket	CNT-09
	Outer Gasket	CNT-08
20 mm (21,52 mm)	Interior Gasket	CNT-010
	Outer Gasket	CNT-08

• Epdm gaskets are sold on a box basis.

Endcap



U50-1358K

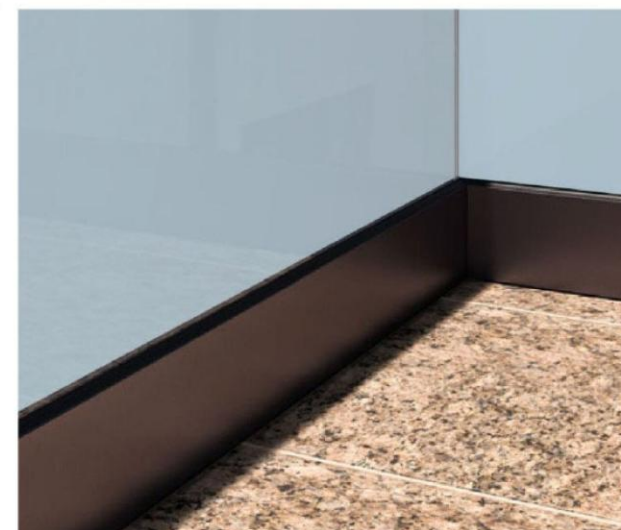

Fixing Components



VJ10X140
Universal Anchor





AK-5299
Wedge Fixing Tool






U50F

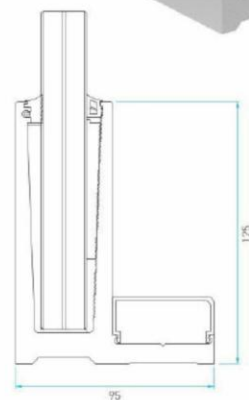


U50F

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile



P-1519
7,14 Kg/m



U50-KM12 (Wedge set for 6+6 mm Glass)
U50-KM16 (Wedge set for 8+8 mm Glass)
U50-KM20 (Wedge set for 10+10 mm Glass)

Code	P-1519
Length	600 cm
Weight	7,14 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Gaskets



Glass Thickness		U50F
16 mm (17,52 mm)	Interior Gasket	CNT-09
	Outer Gasket	CNT-08
20 mm (21,52 mm)	Interior Gasket	CNT-010
	Outer Gasket	CNT-08


• Epdm gaskets are sold on a bar basis.

Cover




P-1345
0,436 Kg/m

Endcap



U50F-1519K

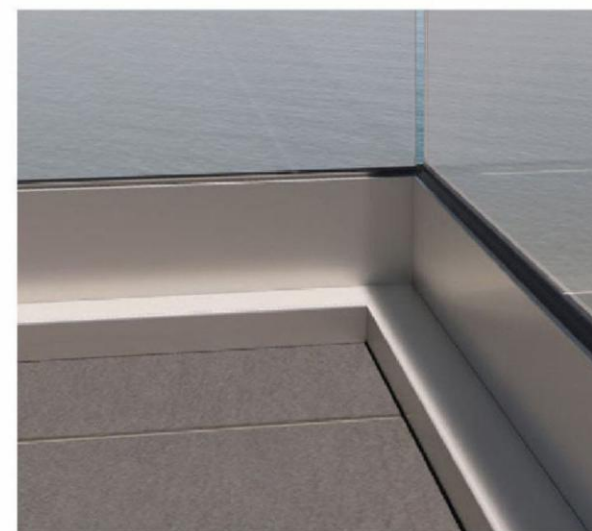

Fixing Components



AK-5027K
Chemical Anchor



GJ10X150
M10 x 100 Threaded Rod
+ Washer + Nut



VJ10X140
Universal Anchor





AK-5299
Wedge Fixing Tool






U50^{Max}

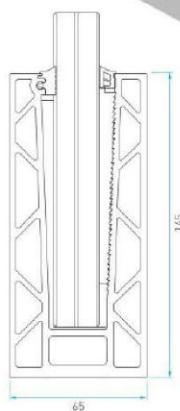


U50^{Max}

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile



P-1518
7,10 Kg/m



U50M-KM12 (Wedge set for 6+6 mm Glass)
U50M-KM16 (Wedge set for 8+8 mm Glass)
U50M-KM20 (Wedge set for 10+10 mm Glass)

Code	P-1518
Length	600 cm
Weight	7,10 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Gaskets




Glass Thickness		U50 Max
16 mm (17,52 mm)	Interior Gasket	CNT-09
	Outer Gasket	CNT-08
20 mm (21,52 mm)	Interior Gasket	CNT-010
	Outer Gasket	CNT-08

* Each gaskets are sold on a box basis.

Endcap



U50M-1518K

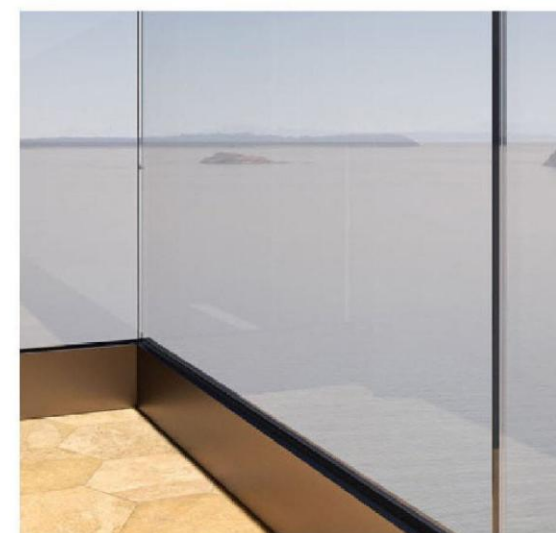

Fixing Components



AK-5027K
Chemical Anchor




GJ10X150
M10 x 100 Threaded Rod
+ Washer + Nut



KB10X140




AK-5299
Wedge Fixing Tool





U50F^{Max}

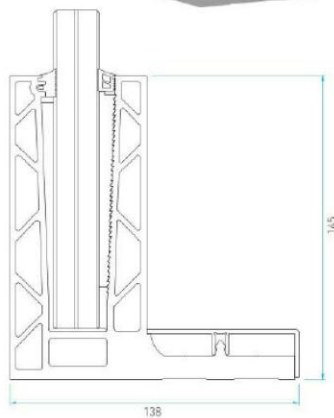


U50F^{Max} System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile



P-1522
9,84 Kg/m



U50M-KM12 (Wedge) 16+6 mm Glass]
U50M-KM16 (Wedge) 18+8 mm Glass]
U50M-KM20 (Wedge) 20+10 mm Glass]

Code	P-1522
Length	400 cm
Weight	9,84 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Gaskets



Glass Thickness		U50F Max
16 mm (17,52 mm)	Interior Gasket	CNT-09
	Outer Gasket	CNT-08
20 mm (21,52 mm)	Interior Gasket	CNT-010
	Outer Gasket	CNT-08


* Epdm gaskets are sold on a box basis.

Cover





P-AL7405
0,620 Kg/m

Endcap



U50FM-1522K

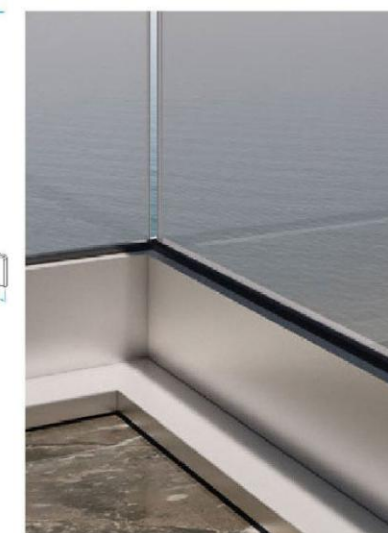

Fixing Components



AK-5027K
Chemical Anchor



GJ10X10.0
M10 x 100 Threaded Rod
+ Washer + Nut




KB10X140



AK-5299
Wedge Fixing Tool



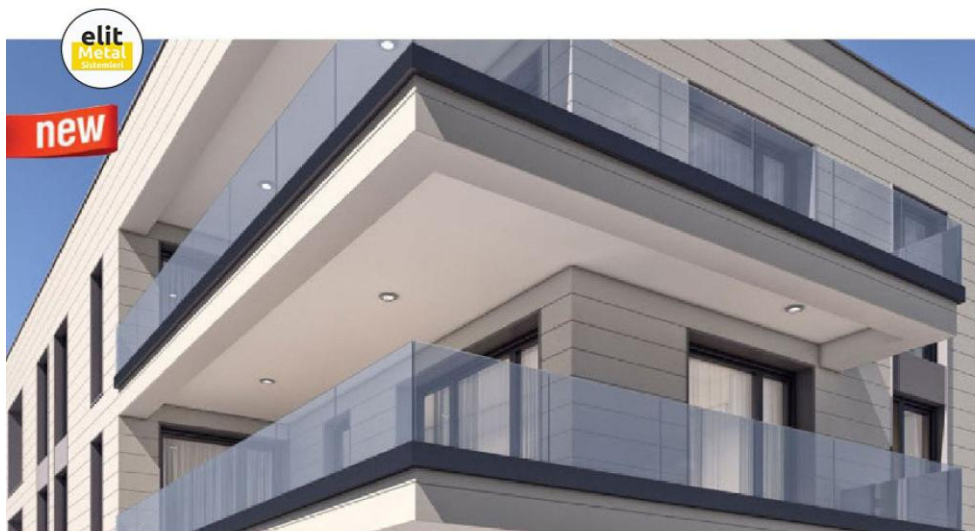


U50R^{Max}




U50R^{Max} System zur Befestigung auf dem Boden / Système Connecté Au Sol


Full Length Base Channel Profile



P-1521
7,25 Kg/m



U50M-KM12 (Wedge set for 6+6 mm Glass)
U50M-KM16 (Wedge set for 8+8 mm Glass)
U50M-KM20 (Wedge set for 10+10 mm Glass)



Code	P-1521
Length	600 cm
Weight	7,25 Kg/m
Finish	Mill Finish
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Gaskets



Glass Thickness		U50R Max
16 mm (17,52 mm)	Interior Gasket	CNT-29
	Outer Gasket	CNT-025
20 mm (21,52 mm)	Interior Gasket	CNT-026
	Outer Gasket	CNT-025

* Epdm gaskets are sold on a box basis.

Cover



P-1520
1,45 Kg/m




P-AL9205
0,140 Kg/m

Endcap



U50RM-1521K

Installation Details

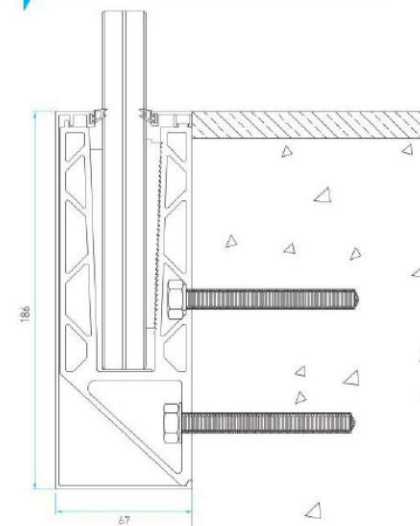

Fixing Components




AK-5027K
Chemical Anchor



GJ10X10.0
M10 x 100 Threaded Rod
+ Washer + Nut




AK-5299
Wedge Fixing Tool






EX50




EX50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile

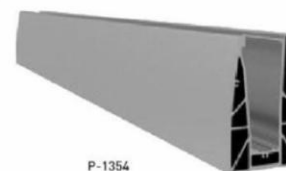

P-1354
4,50 Kg/m



EX50-KM12 (Wedge set for 6+6 mm Glass)
EX50-KM16 (Wedge set for 8+8 mm Glass)
EX50-KM20 (Wedge set for 10+10 mm Glass)

Code	P-1354
Length	500 cm
Weight	4,50 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	12 mm / 12,76 mm / 17,52 mm / 21,52 mm


Gaskets




Glass Thickness		EX50
16 mm (17,52 mm)	Interior Gasket	CNT-09
	Outer Gasket	CNT-019
20 mm (21,52 mm)	Interior Gasket	CNT-010
	Outer Gasket	CNT-019

* Epdm gaskets are sold on a box basis.

Endcap



EX50-1354K

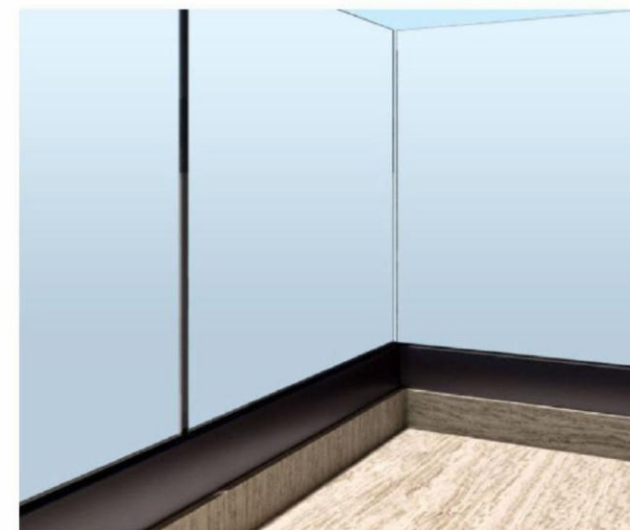

Fixing Components



AK-5027K
Chemical Anchor



GJ10X150
M10 x 100 Threaded Rod
+ Washer + Nut



KB10X140





AK-5299
Wedge Fixing Tool






X50

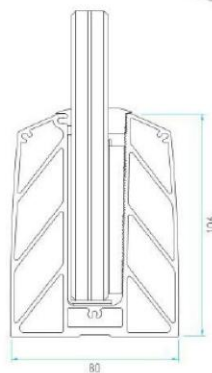


X50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile

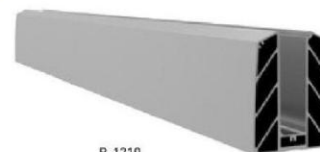

P-1210
4,22 Kg/m



X50-KM10 (Wedge set for 5+5 mm Glass)
X50-KM12 (Wedge set for 6+6 mm Glass)
X50-KM16 (Wedge set for 8+8 mm Glass)

Code	X50-1210
Length	500 cm
Weight	4,22 Kg/m
Finish	Powder Coating / Natural Anodize / Inox Anodize
Pre Drilled Holes	Upon Request
Glass Thickness	10 mm / 12 mm / 12,76 mm / 17,52 mm

Gaskets



Glass Thickness		X50
10 mm	Interior Gasket	CNT-02
	Outer Gasket	CNT-06
12 mm (13,76 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-05
16 mm (17,52 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-01

* Epdm gaskets are sold on a box basis.

Endcap



X50-1210K



Fixing Components



AK-5027K
Chemical Anchor



GJ8X10.0
M10 x 100 Threaded Rod
+ Washer + Nut



KB10X140





AK-5299
Wedge Fixing Tool





N50S

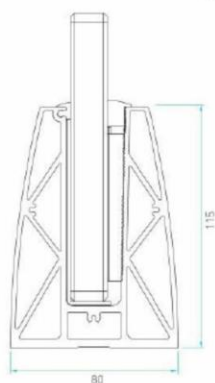

N50S

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile



P-1516
5,45 Kg/m



N50-KM10 (Wedge set for 5+5 mm Glass)
N50-KM12 (Wedge set for 6+6 mm Glass)
N50-KM16 (Wedge set for 8+8 mm Glass)
N50-KM20 (Wedge set for 10+10 mm Glass)

Code	P-1516
Length	600 cm
Weight	5,45 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	10 mm / 12 mm / 12,76 mm / 17,52 mm / 21,52 mm

Gaskets



Glass Thickness		N50S
10 mm	Interior Gasket	CNT-02
	Outer Gasket	CNT-06
12 mm (13,76 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-05
16 mm (17,52 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-01
20 mm (21,52 mm)	Interior Gasket	CNT-022
	Outer Gasket	CNT-01

• Epdm gaskets are sold on a box basis.

Endcap



N50S-1516K



Fixing Components



AK-5027K
Chemical Anchor



GJ10X150
M10 x 100 Threaded Rod
+ Washer + Nut




AK-5299
Wedge Fixing Tool






N50

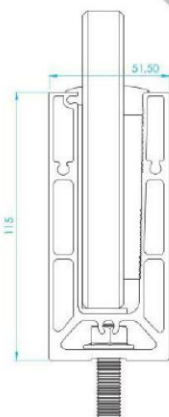

Optional Prefabricated Water Drainage Canals



AK-5292



N50

System zur Befestigung auf dem Boden / Système Connecté Au Sol



Full Length Base Channel Profile




P-1024
4,50 kg/m
(N50-8984)



N50-KM10 | Wedge set for 5+5 mm Glass
N50-KM12 | Wedge set for 6+6 mm Glass
N50-KM16 | Wedge set for 8+8 mm Glass
N50-KM20 | Wedge set for 10+10 mm Glass

Code	P-1024
Length	500 cm
Finishing	Natural Anodize / Powder Coating
Glass Thickness	10,76mm/12,76mm/16,76mm/17,52mm/21,52mm
Prefabricated	Upon Request
Plastic Wedge+Spacer	X
Gaskets	X

Endcaps



N50-1024K

Gaskets



Glass Thickness	N50
10 mm	Interior Gasket CNT-02 Outer Gasket CNT-06
12 mm (13,76 mm)	Interior Gasket CNT-02 Outer Gasket CNT-05
16 mm (17,52 mm)	Interior Gasket CNT-02 Outer Gasket CNT-01
20 mm (21,52 mm)	Interior Gasket CNT-022 Outer Gasket CNT-01

• Epdm gaskets are sold on a box basis.

Fixing Components



AK-5027K
Chemical Anchor




GJ10X150
M10 x 150 Threaded Rod + Washer + Nut



AK-5299
Wedge Fixing Tool





Installation Details

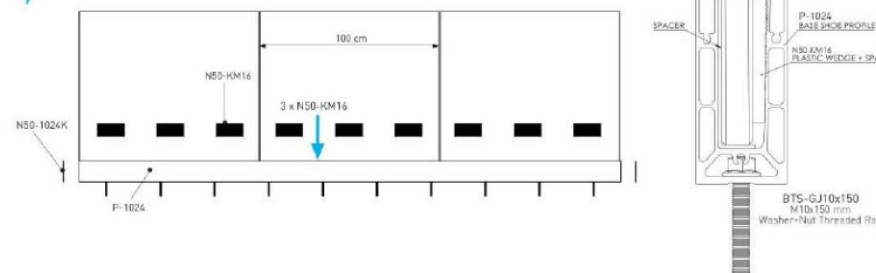



N50F

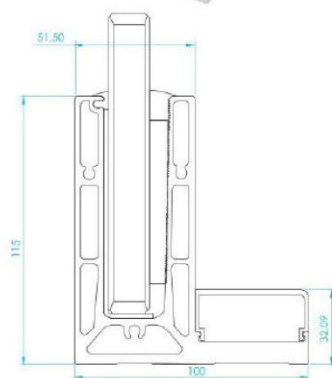

N50F

System zur Betestigung auf dem Boden / Système Connecté Au Sol



Full Length Base Channel Profile



P-1025
5,70 kg/m
(N50F-1952)



N50-KM10 [Wedge set for 5+5 mm Glass]
N50-KM12 [Wedge set for 6+6 mm Glass]
N50-KM16 [Wedge set for 8+8 mm Glass]
N50-KM20 [Wedge set for 10+10 mm Glass]

Code	P-1025
Length	500 cm
Finishing	Natural Anodize / Powder Coating
Glass Thickness	10,76mm/12,76mm/16,76mm/17,52mm/21,52mm
Prefabricated	Upon Request
Plastic Wedge+Spacer	X
Gaskets	X

Covers



P-1345
0,436 kg/m
(N50F-1953)

Endcaps



N50F-1025K

Gaskets



Glass Thickness	N50F
10 mm	Interior Gasket: CNT-02 Outer Gasket: CNT-06
12 mm (13,76 mm)	Interior Gasket: CNT-02 Outer Gasket: CNT-05
16 mm (17,52 mm)	Interior Gasket: CNT-02 Outer Gasket: CNT-01
20 mm (21,52 mm)	Interior Gasket: CNT-022 Outer Gasket: CNT-01

* Epdm gaskets are sold on a bar basis.

Fixing Components



AK-5027K
Chemical Anchor




GJ10X150
M10 x 150 Threaded Rod + Washer + Nut



AK-5299
Wedge Fixing Tool





Installation Details

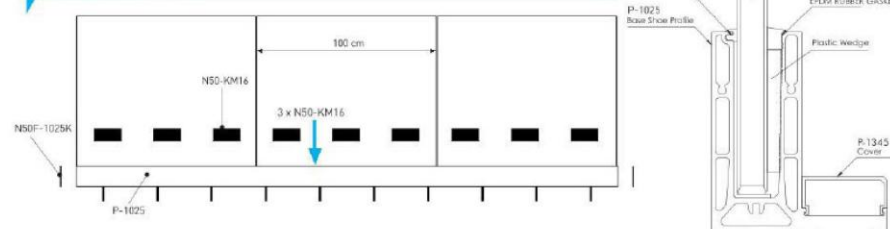




N50R

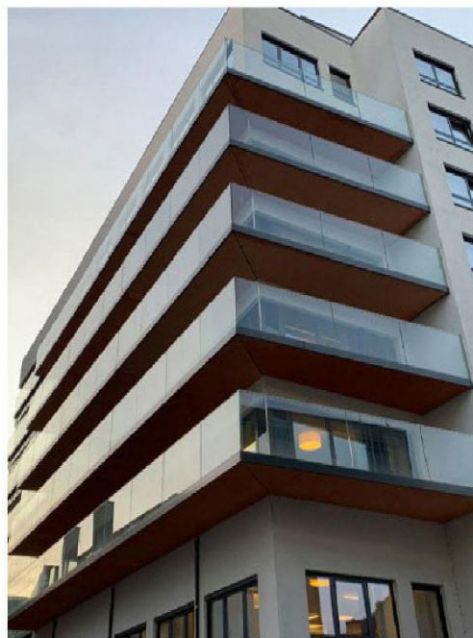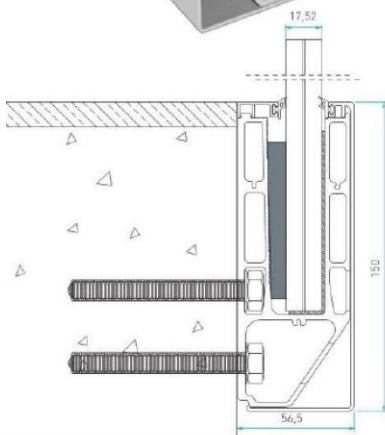

N50R

Full Length Base Channel Profile

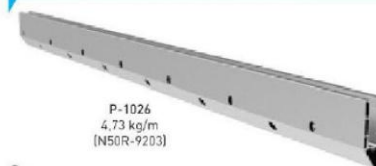

P-1026
4,73 kg/m
(N50R-9203)

Code	P-1026
Length	500 cm
Finishing	Mill Finish
Glass Thickness	12,76 mm / 16,76 mm / 17,52 mm / 21,52 mm
Prefabricated	Upon Request
Plastic Wedge+Spacer	X
Gaskets	X

Covers



P-AL9204
0,947 Kg/m




P-AL9205
0,140 Kg/m

Endcaps



N50R-1026K

Wedges & Spacer



N50-KM10 (Wedge set for 5+5 mm Glass)
N50-KM12 (Wedge set for 6+6 mm Glass)
N50-KM16 (Wedge set for 8+8 mm Glass)
N50-KM20 (Wedge set for 10+10 mm Glass)

Gaskets



Glass Thickness		N50R
10 mm	Interior Gasket	CNT-029
	Outer Gasket	CNT-029
12 mm (13,76 mm)	Interior Gasket	CNT-029
	Outer Gasket	CNT-026
16 mm (17,52 mm)	Interior Gasket	CNT-029
	Outer Gasket	CNT-025
20 mm (21,52 mm)	Interior Gasket	CNT-025
	Outer Gasket	CNT-025

* Epdm gaskets are sold on a box basis.

Fixing Components




AK-5027K
Chemical Anchor




GJ10X150
M10 x 150 Threaded Rod + Washer + Nut



AK-5299
Wedge Fixing Tool







Installation Details

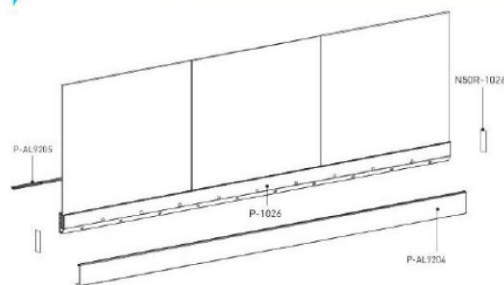



C70

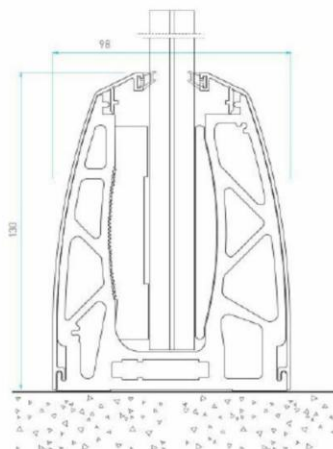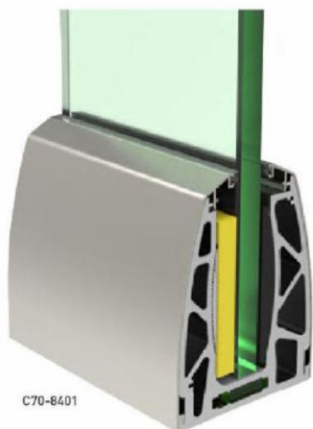

C70

System zur Befestigung auf dem Boden mit Glaswinkleinstellung
Reglable garde corps en verre sur sol


Glass Support Base Shoes



C70-8401



C70-8401/30



- Material List**
1- Glass support base shoe
2- Magic pack
3- Bubble level
4- Adjusting wedge

Gaskets



Glass Thickness	Interior Gasket	Outer Gasket
16 mm (17,52 mm)	CNT-923GK	CNT-923GK

• Epdm gaskets are sold on a box basis.

Full Length Base Channel Profile



C70-8401/3M



C70-MP16
Magic pack set for 8-8 mm Glass

Code	C70-8401	C70-8401/30	C70-8401/3M
Length	15 cm	30 cm	300 cm
Glass Thickness	16,4 mm / 17,52 mm Glass		
Prefabricated	✓	✓	Upon Request
Magic Pack	Included	Included	✗

Covers



C70-8402



C70-8403



Endcaps



C70-8402K



C70-8403K

Fixing Components




AK-5027K
Chemical anchor



GJ10X150
M10 x 150 Threaded rod + Washer + Nut






Installation Details

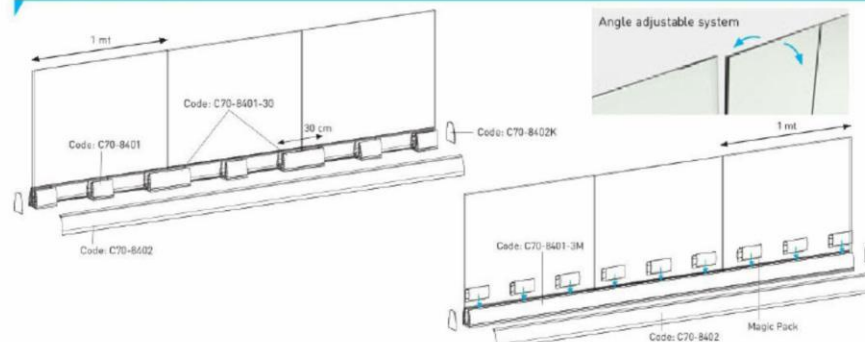




C60

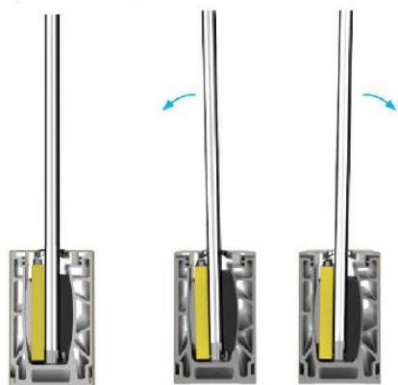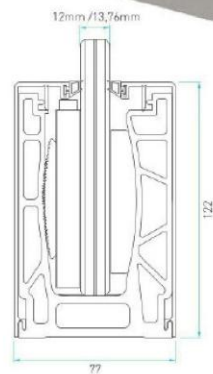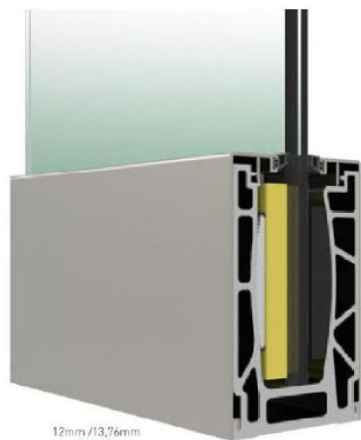


C60

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes



C60-1008



C60-1008/30



C60-MP

Gaskets



Glass Thickness	Interior Gasket	Outer Gasket
12 mm (13,76 mm)	CNT-023GK	CNT-023GK


• Extern gaskets are sold on a box basis.

Full Length Base Channel Profile



P-1008
5,852 kg/m

Endcap



C60-1008K

Cover



P-1009
0,776 kg/m

Code	C60-1008	C60-1008/30
Length	15 cm	30 cm
Glass Thickness	12 mm / 13,52 mm	
Prefabricated	✓	✓
Magic Pack	Included	Included
Spacer	Included	Included



Fixing Components



AK-5027K
Chemical Anchor



GJ10X150
M10 x 100 Threaded Rod
+ Washer + Nut



KB10X140






AK-5299
Wedge Fixing Tool






AS55

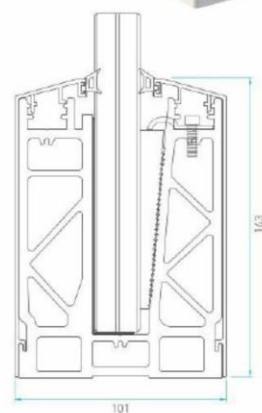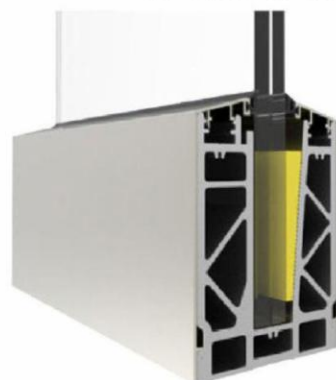

AS55

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes



AS55-1494



AS55-1494/30


Gaskets




Glass Thickness		AS55
16 mm (17,52 mm)	Interior Gasket	CNT-029
	Outer Gasket	CNT-025
20 mm (21,52 mm)	Interior Gasket	CNT-026
	Outer Gasket	CNT-025

• Epdm gaskets are sold on a box basis.

Full Length Base Channel Profile

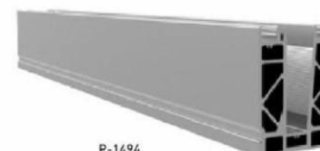

P-1494
10,98 kg/m



AS55-KM16 (8+8 mm Glass)
AS55-KM20 (10+10 mm Glass)

Code	AS55-1494	AS55-1494/30	AS55-5397	AS55-5397/30
Length	15 cm	30 cm	15 cm	30 cm
Glass Thickness	16,4 mm / 17,52 mm		20 mm / 21,52 mm	
Prefabricated	✓	✓	✓	✓
Plastic Wedge	Included	Included	Included	Included
Spacer	Included	Included	Included	Included

Endcap



AS55-1494K

Cover



P-1513
0,921 kg/m



Fixing Components



AK-5027K
Chemical Anchor



GJ10X100
M10 x 100 Threaded Rod
+ Washer + Nut



KB10X140





AK-5299
Wedge Fixing Tool





R50^{Neo}

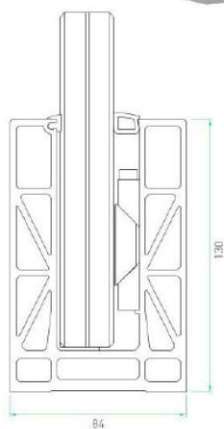

R50^{Neo}

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Full Length Base Channel Profile



P-1517
8,23 Kg/m



R50N-KM20 (Aluminium fixing tool for 21,52 mm glass + Spacer)
R50N-KM25 (Aluminium fixing tool for 25,52 mm glass + Spacer)

Code	P-1517
Length	500 cm
Weight	8,23 Kg/m
Finish	Natural Anodize / Powder Coating
Pre Drilled Holes	Upon Request
Glass Thickness	21,52 mm / 25,52 mm

Gaskets





Glass Thickness		R50 Neo
20 mm (21,52 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-035
25 mm (25,52 mm)	Interior Gasket	CNT-02
	Outer Gasket	CNT-01

* Epdm gaskets are sold on a box basis.

Endcap



R50N-1517K

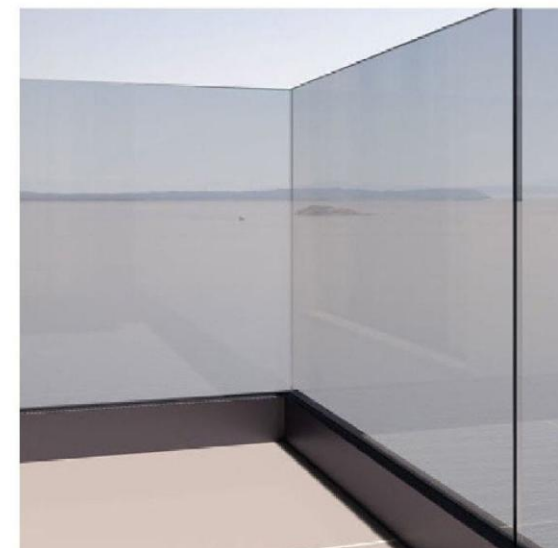

Fixing Components




AK-5027K
Chemical Anchor



GJ10X150
M10 x 100 Threaded Rod
+ Washer + Nut




AK-5299
Wedge Fixing Tool





FX50

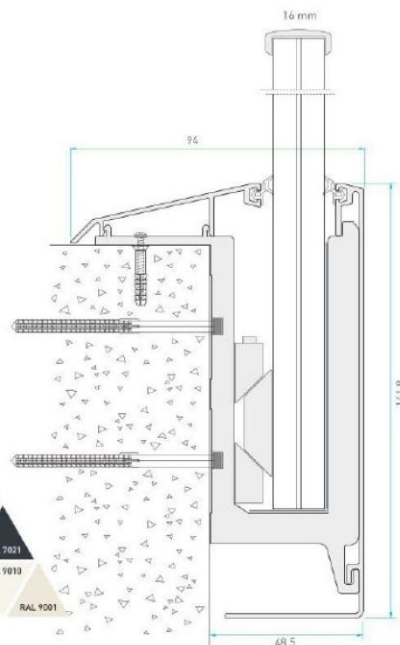

FX50

Seitliches Verbindungssystem / Système de Connexion Latérale

Full Length Base Channel Profile



Covers



Endcaps



Fixing Components



Gaskets

Glass Thickness	FX50
12 mm (13.76 mm)	Interior Gasket CNT-026
12 mm (13.76 mm)	Outer Gasket CNT-025
16 mm (17.52 mm)	Interior Gasket CNT-026
16 mm (17.52 mm)	Outer Gasket CNT-025
20 mm (21.52 mm)	Interior Gasket CNT-025
20 mm (21.52 mm)	Outer Gasket CNT-025


* Epdm gaskets are sold on a box basis.

Installation Details





NX50

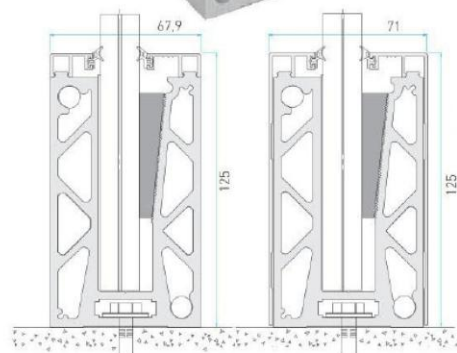

NX50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes



Material List
1- Glass support base shoe
2- Spacer
3- Plastic wedge

Full Length Base Channel Profile



Code	NX50-7883	NX50-7883/30	NX50-5320	NX50-5320/30	PR-7883
Length	15 cm	30 cm	15 cm	30 cm	300 cm
Glass Thickness	16,4 mm / 17,52 mm Glass	20,4 mm / 21,52 mm Glass	20,4 mm / 21,52 mm Glass	20,4 mm / 21,52 mm Glass	16,4 mm / 17,52 mm Glass 20,4 mm / 21,52 mm Glass
Prefabricated Plastic Wedge + Spacer	✓	✓	✓	✓	Upon Request
	Included	Included	Included	Included	X



NX50-KMS16 (8+8 mm Glass)
NX50-KMS20 (10+10 mm Glass)

Covers



NX50-7884




NX50-7885

Endcaps



NX50-7986



NX50-7884K NX50-7985K

Connector Pin



NX50-7883PM

Connection of NX50-7883 Base Profile

Fixing Components



AK-5027K

Chemical Anchor



KB10X140

M10 x 150 Threaded Rod + Washer + Nut



GJ10X150



AK-5299


Wedge Fixing Tool

Gaskets

Glass Thickness		NX50
12 mm (13,76 mm)	Interior Gasket	CNT-029
	Outer Gasket	CNT-025
16 mm (17,52 mm)	Interior Gasket	CNT-026
	Outer Gasket	CNT-025
20 mm (21,52 mm)	Interior Gasket	CNT-025
	Outer Gasket	CNT-025



* Epdm gaskets are sold on a box basis.

Installation Details

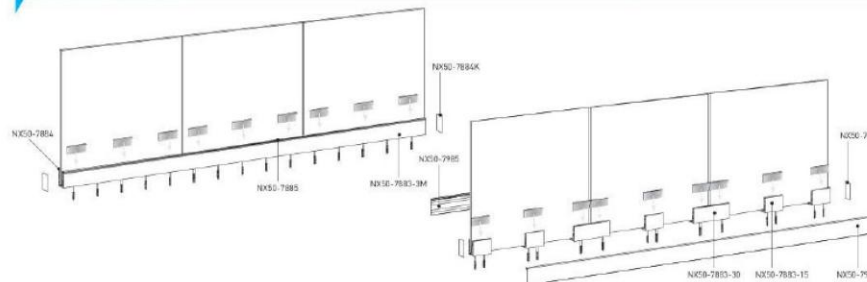



M50

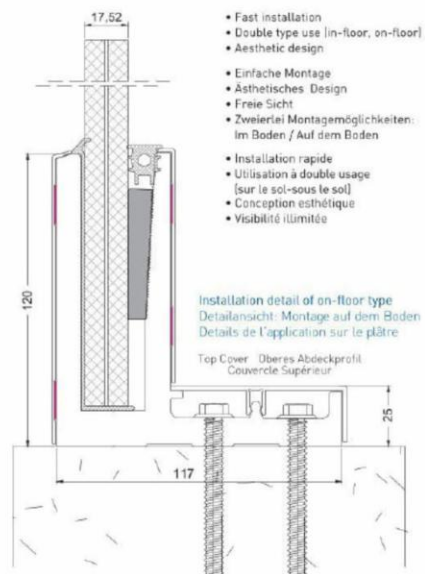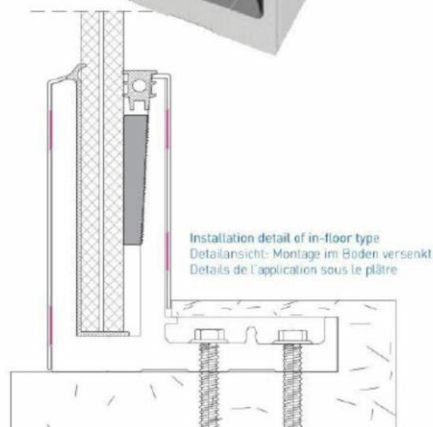

- Fast installation
- Double type use (in-floor, on-floor)
- Aesthetic design
- Einfache Montage
- Ästhetisches Design
- Freie Sicht
- Zweierlei Montagemöglichkeiten:
Im Boden / Auf dem Boden
- Installation rapide
- Utilisation à double usage
(sur le sol-sous le sol)
- Conception esthétique
- Visibilité illimitée


M50

Zweiterlei Anwendungsmöglichkeiten / Système de Double Usage


Full Length Base Channel Profile




Code	M50-6962
Length	200 cm
Glass Thickness	16,4 mm / 17,52 mm / 21,52 mm Glass
Prefabricated	Upon Request
Spacer	X
Wedge	X



Covers



Endcaps



Gaskets





Glass Thickness		M50
16 mm (17,52 mm)	Interior Gasket	CNT-020
20 mm (21,52 mm)	Interior Gasket	CNT-021

• Epdm gaskets are sold on a bar basis.

Fixing Components



Installation Details

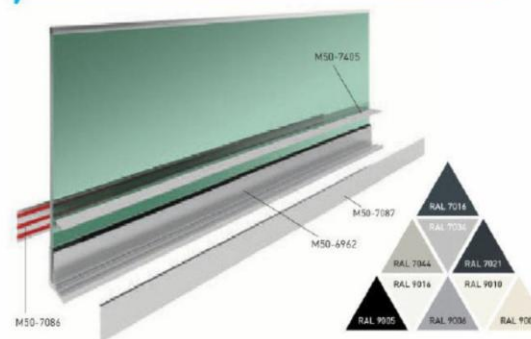

Alloy EN AW 6063
Stress and relocation results on 1mt base profile with 500 kg horizontal load to the highest surface of the profile.

Belastungs- und Verlagerungsergebnisse auf 1 m Basis Profil bei Belastung mit 500 kg, horizontale Belastung auf der höchsten Oberfläche des Profils.

EN AW 6063
Le stress et le démenagement résultant sur la surface la plus haute de profil de base de 1 mt à la suite d'une charge horizontale de 500 kg






CL50



ABP
CERTIFIED
PRODUCT



6+6 mm / 8+8 mm Glass

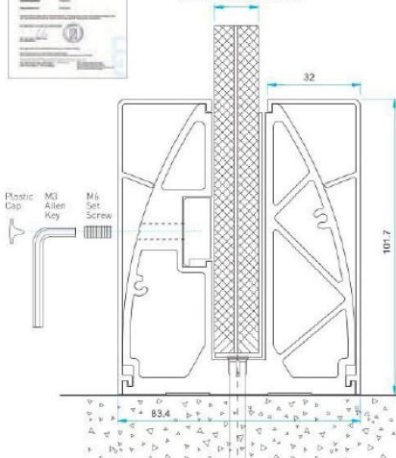

CL50

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes




CL50-7276



CL50-7276/30

Code	CL50-7276	CL50-7276/30
Length	15 cm	30 cm
Glass Thickness	12,4 mm / 17,52 mm Glass	
Prefabricated	✓	✓
Pressing Stick	Included	Included
Spacer	Included	Included
Set screws	Included	Included



Material List

- 1- Glass support base shoe
- 2- Spacer
- 3- Pressing stick
- 4- M6 Set screw

Covers



CL50-7277



CL50-7279

Endcaps



CL50-7277K



CL50-7279K

Fixing Components



VJ10X140
Universal Anchor


Gasket



Glass Thickness	CL50
12 mm (12,76 mm)	Interior Gasket CNT-022

• Epdm gaskets are sold on a box basis.

Installation Details

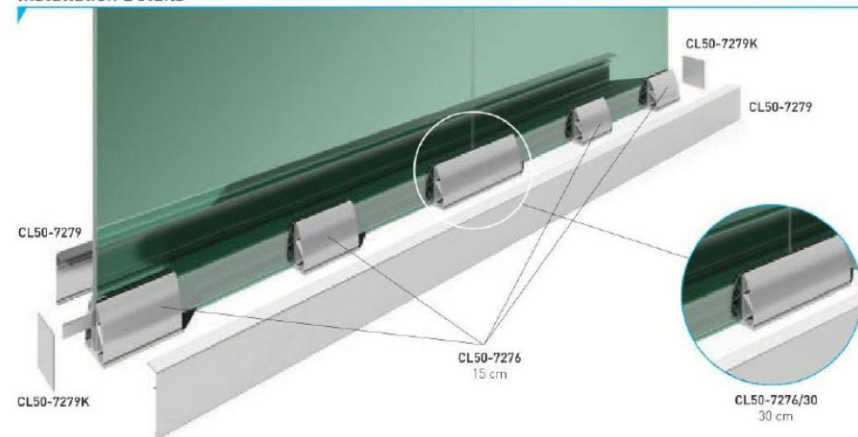




CL40



12,4mm / 13,52mm
16,4mm / 17,52mm Glass

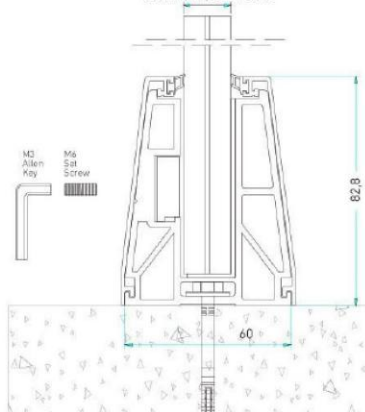

CL40

System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes




CL40-9189

CL40-9189/30

Material List

- 1- Glass support base shoe
- 2- Spacer
- 3- Pressing stick
- 4- M6 Set screw

Code	CL40-9189	CL40-9189/30	CL40-5345	CL40-5345/30
Length	15 cm	30 cm	15 cm	30 cm
Glass Thickness	12,4mm/ 13,52 mm Glass	12,4mm/ 13,52 mm Glass	16,4mm/ 17,52 mm Glass	16,4mm/ 17,52 mm Glass
Prefabricated	✓	✓	✓	✓
Pressing Stick	Included	Included	Included	Included
Spacer	Included	Included	Included	Included
Set screws	Included	Included	Included	Included



Covers



CL40-9190

CL40-9190K

Endcaps

Fixing Components



KB10X140


Gaskets




Glass Thickness	CL40
12 mm (13,76 mm)	Interior Gasket CNT-026 Outer Gasket CNT-026
16 mm (17,52 mm)	Interior Gasket CNT-025 Outer Gasket CNT-025


• Epdm gaskets are sold on a box basis.

Installation Details

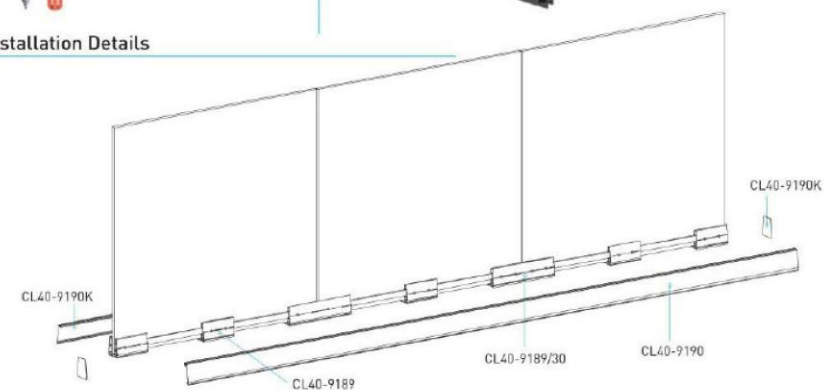

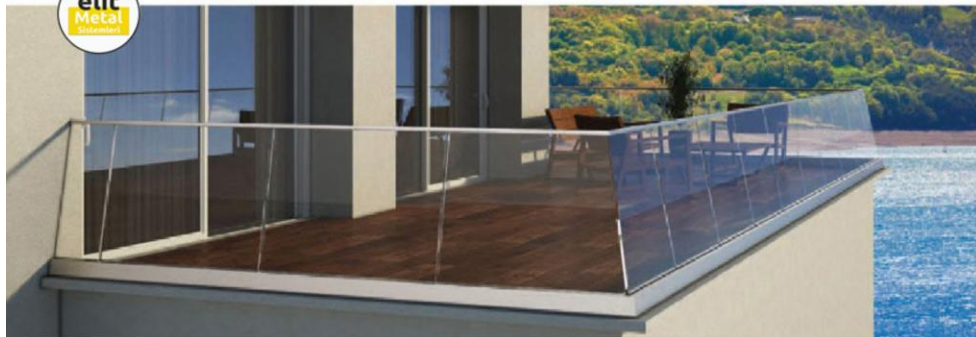

RX50

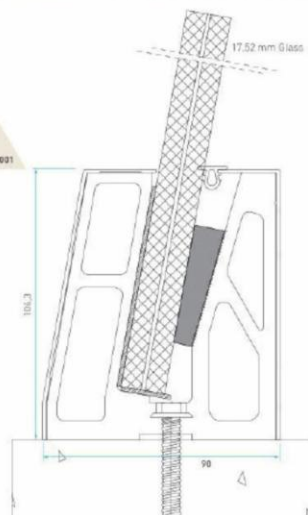

RX50


System zur Befestigung auf dem Boden / Système Connecté Au Sol

Glass Support Base Shoes




RX50-7334
8,70 kg/m

RX50-7334/30



Material List
1- Glass support base shoe
2- Spacer
3- Plastic wedge

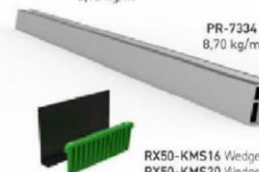

PR-7334
8,70 kg/m

Code	RX50-7334	RX50-7334-30	RX50-5325	RX50-5325-30	PR-7334
Length	15 cm	30 cm	15 cm	30 cm	200 cm
Glass Thickness	16,4 mm / 17,52 mm Glass	16,4 mm / 17,52 mm Glass	20,4 mm / 21,52 mm Glass	20,4 mm / 21,52 mm Glass	16,4 mm / 21,52 mm
Prefabricated	✓	✓	✓	✓	Upon Request
Plastic Wedge + Spacer	Included	Included	Included	Included	X

RX50-KMS16 Wedge set for 8+8 mm Glass
RX50-KMS20 Wedge set for 10+10 mm Glass

Covers



RX50-7335
Inner Cover

RX50-7336
Rear Cover

Endcaps



RX50-7336K

Fixing Components



KB10X140


AK-5299
Wedge Fixing Tool

Gaskets

Glass Thickness		RX50
16 mm (17,52 mm)	Interior Gasket	CNT-023
20 mm (21,52 mm)	Interior Gasket	FT11

• Epdm gaskets are sold on a box basis.

Installation Details

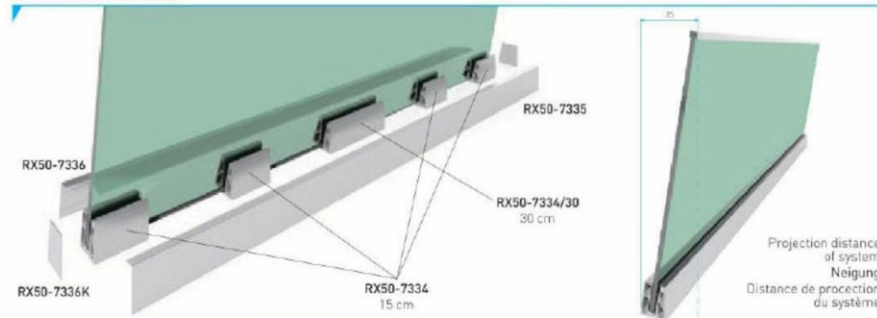


Projection distance of system
Neigung
Distance de projection du système



ELEGANT
SERIES CA50

CA50

Mass/Block/Masse: 9.89846 kg
Volume/Volumen/Volume: 0.000517958 m³
Density/Dichte/Densité: 2700 kg/m³
Weight/Gewicht/Poids/Force: 13.7052 N





In Boden versenkte Befestigung / Système Connecté Sous Sol




Alloy EN AW 6063
Stress and relocation
results on 1m Basis Profile bei
horizontal load to the
highest surface of the
profile.

Belastungs- und
Verlagerungsergebnisse
auf 1 m Basis Profil bei
Belastung mit 1 Tonne
(10.000 NT), horizontale
Belastung auf der höchsten
Oberfläche des Profils.


EN AW 6063
Le stress et le
déménagement résultant
sur la surface la plus haute
de profilé de base de 1 m
à la suite d'une charge
horizontale de 1000 kg.

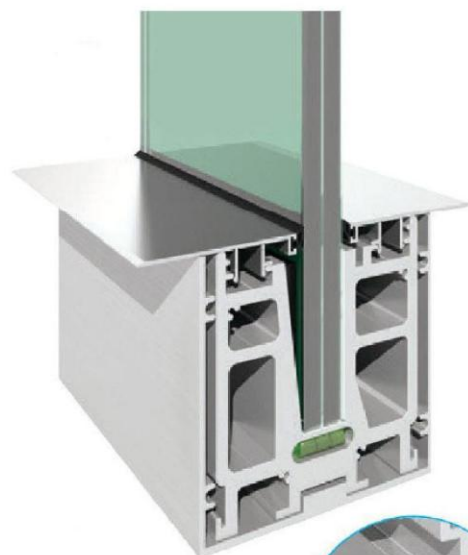


Height Adjusting Profile
Höhenstellungsprofil
Définitions des onglets



Height Adjusting U Case Profile Option
Höhenstellungsprofil für U Gehäuse
Option pour cadre réglable

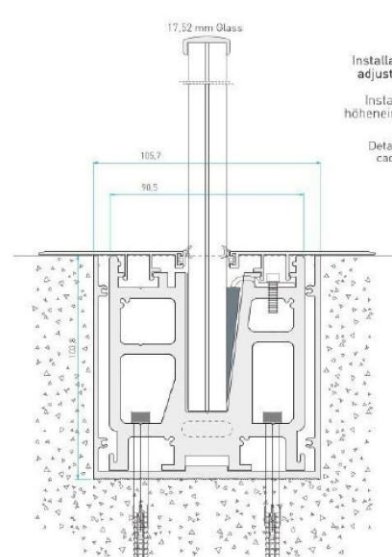

Installation detail of height
adjustable U case profile
Installationsdetails für
höhenstellbare U Gehäuse
Details d'application de
cadre réglable CA50

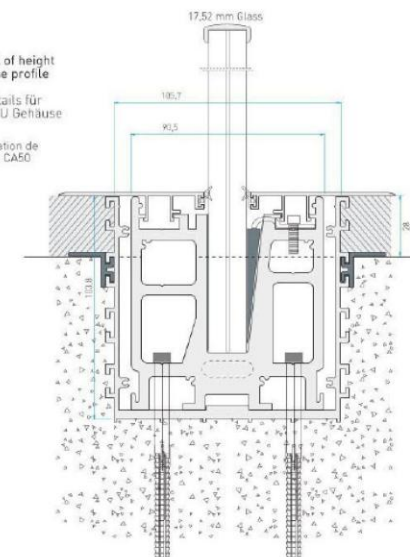



Glass Support Base Shoes




Full Length Base Channel Profile



Code	C50-5280	C50-5280/30	C50-6548	C50-6548/30	C50-6844	C50-6844/30	P-1001	P-1006
Length	15 cm	30 cm	15 cm	30 cm	15 cm	30 cm	200 cm	200 cm
Glass Thickness	12,4mm/ 13,52 mm Glass		16,4mm/ 17,52 mm Glass		20,4mm/ 21,52 mm Glass		12,4 / 17,52 mm	20,4 / 21,52 mm
Prefabricated	✓		✓		✓		Upon Request	Upon Request
Plastic Wedge	Included	Included	Included	Included	Included	Included	X	X
Spacer	Included	Included	Included	Included	Included	Included	X	X
Wedge Locking	Included	Included	Included	Included	Included	Included	X	X

Covers



System U Case Profiles





Fixing Components



CA50


In Boden versenkte Befestigung / Système Connecté Sous Sol

Installation Details

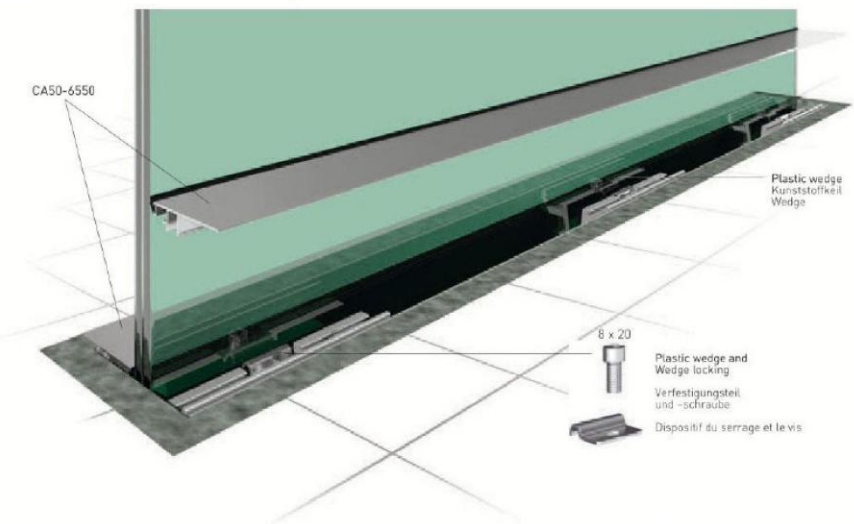
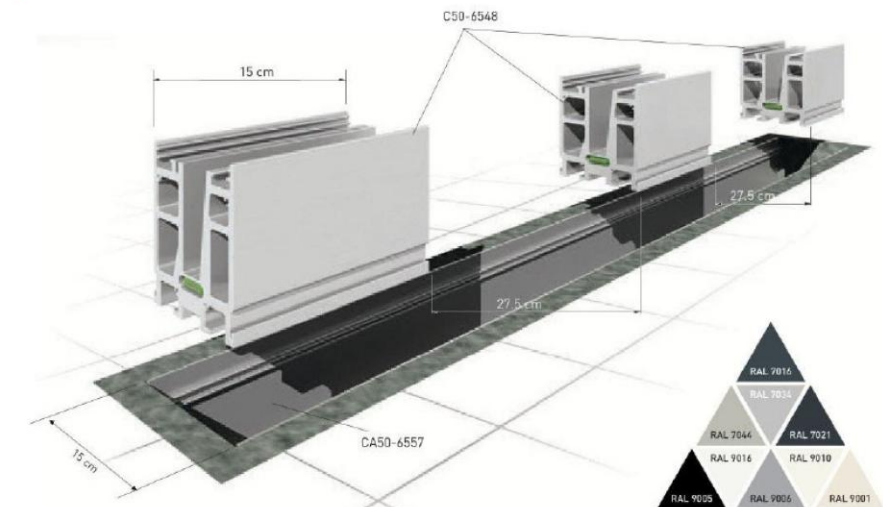




CX50

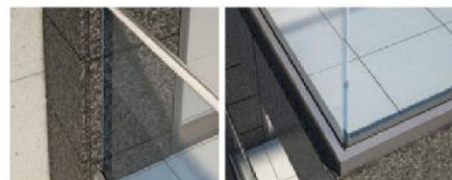

Sealing profile
Dichtungsprofil
Profilé d'étanchéité

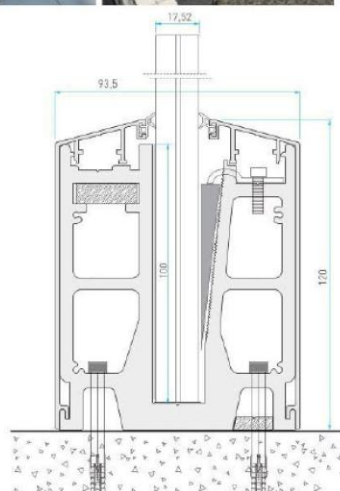

CX50

System zur Befestigung auf dem Boden / Système Connecté Au Sol


Glass Support Base Shoes



CX50-7646



CX50-7646/30



Material List

- 1- Glass support base shoe
- 2- Bubble level
- 3- Spacer
- 4- Plastic wedge

Full Length Base Channel Profile



PR-7646



CX50-KMS12 Wedge set for 6+6 mm Glass
CX50-KMS16 Wedge set for 8+8 mm Glass

Gaskets

Glass Thickness	Interior Gasket	CX50
16 mm (17,52 mm)	Outer Gasket	CNT-025

Epoxy gaskets are sold on a bar basis.



Code	CX50-5284	CX50-5284/30	CX50-7646	CX50-7646/30	PR-7646
Length	15 cm	30 cm	15 cm	30 cm	200 cm
Glass Thickness	12,4 mm / 13,52 mm Glass		16,4 mm / 17,52 mm Glass		12,4mm / 17,52mm
Prefabricated	✓	✓	✓	✓	Upon Request
Plastic Wedge + Spacer	Included	Included	Included	Included	X

Covers



CX50-7647



CX50-7648

Endcaps



CX50-7647K



CX50-7648K

Alignment Profile



PR-7649



Fixing Components



VJ10X140
Universal Anchor




AK-5299
Wedge Fixing Tool

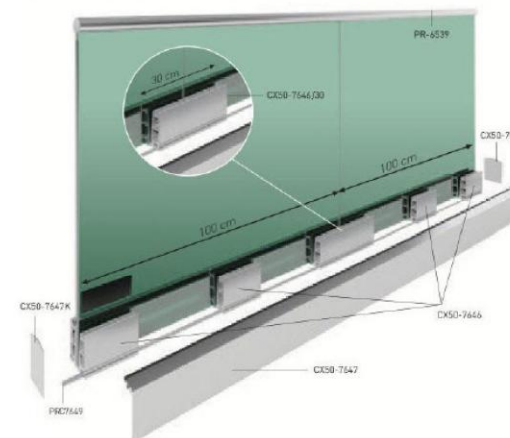




D50

- Detail of linear profile application
- Anwendungsdetail des linearen Profils
- Détails de l'utilisation de profil en toute longueur

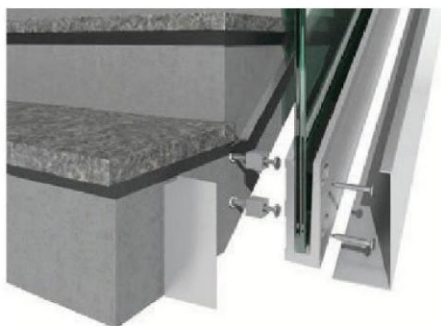

- Detail of piece by piece application
- Anwendungsdetail für Stücke
- Détail de l'utilisation du profil en longueur choisie

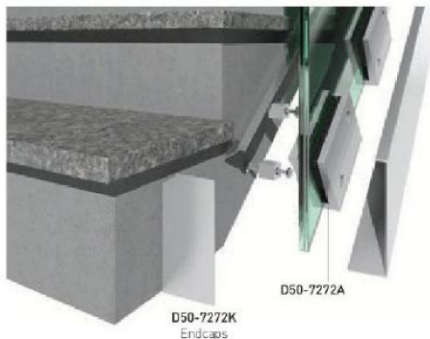

D50

Treppentyp Glasgeländer / Montage direct à la paroi latérale


Glass Support Base Shoes



D50-7272
15 cm Standard Block



D50-7272-A
15 cm Adjustable Block



Material List

- 1- Glass support base shoe
- 2- Spacer
- 3- Plastic wedge

Full Length Base Channel Profiles



D50-7272L2M
10,30 kg/m
2 m Standard Support Profile




D50-7272AL2M
2 m Adjustable
Support Profile



Code	D50-7272	D50-7272-A	D50-5335	D50-5335-A	D50-7272L2M	D50-7272AL2M
Length	15 cm	15 cm	15 cm	15 cm	200 cm	200 cm
Glass	16,4 mm / 17,52 mm Glass	16,4 mm / 17,52 mm Glass	20,4 mm / 21,52 mm Glass	20,4 mm / 21,52 mm Glass	16,4 mm / 17,52 mm Glass 20,4 mm / 21,52 mm Glass	16,4 mm / 17,52 mm Glass 20,4 mm / 21,52 mm Glass
Thickness	✓	✓	✓	✓	✓	✓
Prefabricated	✓	✓	✓	✓	✓	✓
Plastic Wedge + Spacer	Included	Included	Included	Included	X	X
Adjusting Supports	X	Included	X	Included	X	Included



Covers





Gaskets


Glass Thickness	D50
16 mm (17,52 mm)	Outer Gasket CNT-021
20 mm (21,52 mm)	Outer Gasket CNT-022

Fixing Components



Installation Details

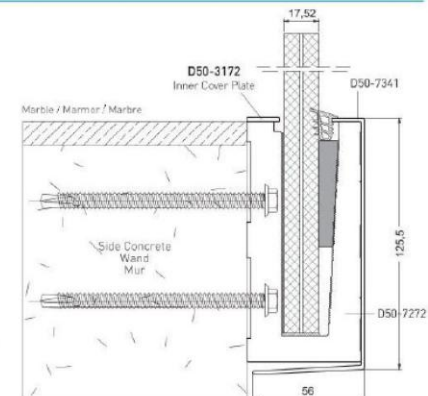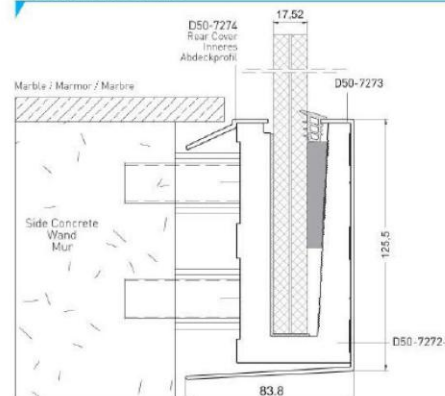


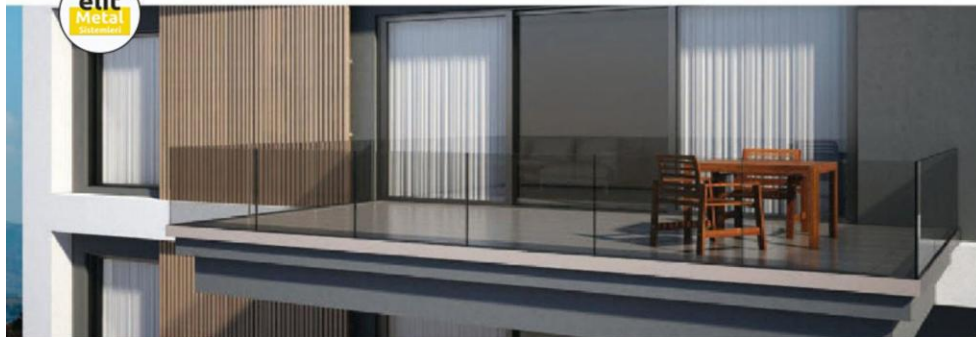

D55



ABP
CERTIFIED
PRODUCT

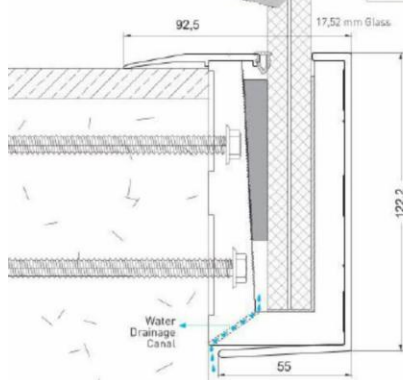


D55

Biegsames Glasgeländersystem zur externen Befestigung
Système de rampe en verre centrable avec connection frontale

Glass Support Base Shoes




D55-7927



Material List

- 1- Glass support base shoe
- 2- Plastic wedge
- 3- Spacer



Full Length Base Channel Profiles



D55-7927/2M
9.20 Kg/m



D55-KM16
(8+8 mm Glass)
D55-KM20
(10+10 mm Glass)



BTS-LP1
(100 cm)

Code	D55-7927	D55-5340	D55-7927/2M
Length	15 cm	15 cm	200 cm
Glass Thickness	16.4 mm / 17.52 mm	20.4 mm / 21.52 mm	16.4 mm / 17.52 mm / 20.4 mm / 21.52 mm
Prefabricated	✓	✓	Upon Request
Plastic Wedge + Spacer	Included	Included	X

Covers



D55-7960
Dual Use For
8+8 mm & 10+10 mm Glass



D55-7928

Gaskets



Glass Thickness	D55	
16 mm (17.52 mm)	Interior Gasket	CNT-021
20 mm (21.52 mm)	Interior Gasket	CNT-022

• Epdm gaskets are sold on a box basis.

Endcaps



D55-7927K


Fixing Components



KB10X140




AK-5299
Wedge Fixing Tool




Installation Details

→ Linear Continuous Profile Installation

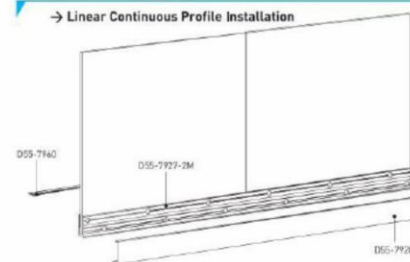


→ Part by Part Installation

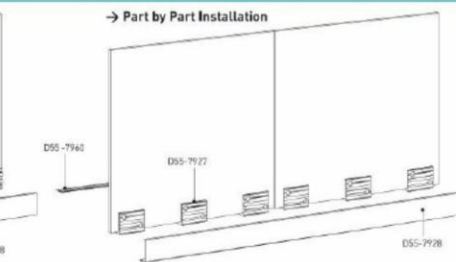




AL50

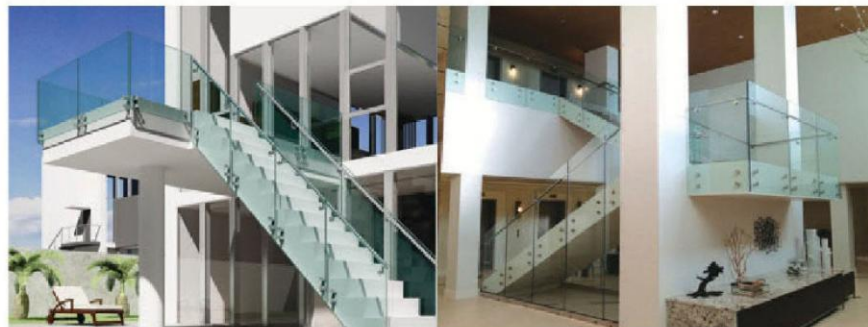


AL50

Seitliches Glas Befestigungssystem / Système de Connexion Latérale


Standoff Glass Adapter

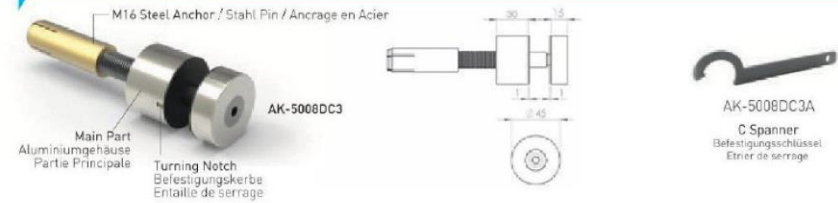

Adjustable Standoff Glass Adapter

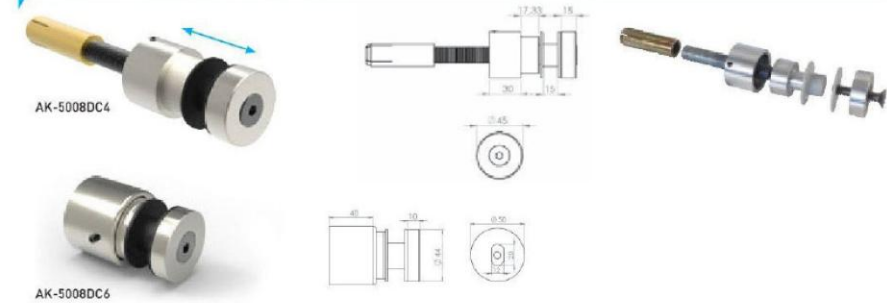



Adjustable Square Standoff Glass Adapter

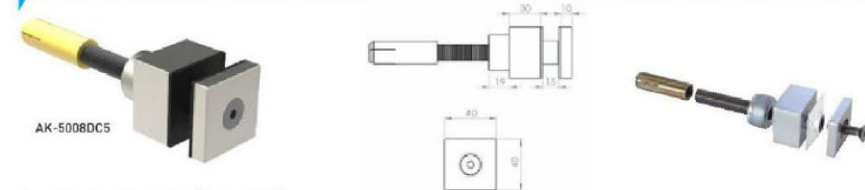

Installation Details [8+8+1,52]

Installation Guide on Glass (Hole Drilling Dimensions)

Montage Entsprechend zum verwendeten Glas [Abmessungen für Glasbohrung]
Schéma d'installation par le verre de 8+8+1,52 [Distance de perçage sur le verre]

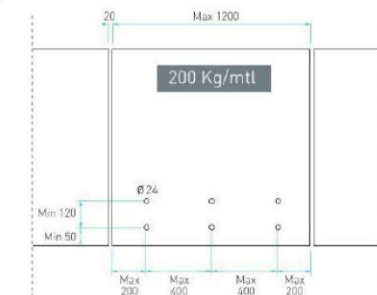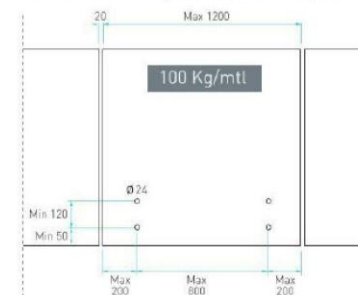




S40




Alloy EN AW 6063
Stress and relocation
results on 1 m. base profile
with 350 kg horizontal load
to the highest surface of the
profile.



Mass/Block/Masse: 2.77916 kg
Volume/Volumen/Volume: 0.00102932 m³
Density/Dichte/Densité: 2700 kg/m³
Weight/Gewicht/Poids/Force: 27.2358 N

Belastungs- und
Verlagerungsergebnisse
auf 1 m. Basis Profil bei
Belastung mit 350 kg,
horizontale Belastung auf
der höchsten Oberfläche
des Profils.

EN AW 6063
Le stress et le
déménagement résultant
sur la surface la plus haute
de profilé de base de 1 m.
à la suite d'une charge
horizontale de 350 kg.

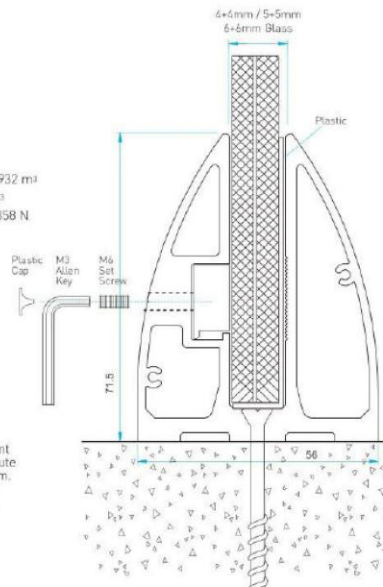

S40

Glass Support Base Shoes



S40-6981

Code	S40-6981
Length	600 cm / 580 cm
Glass Thickness	8,76 mm / 10,76 mm / 12,76 mm Glass
Finish	Anodized / RAL Powder Coated
Prefabricated	✓
Spacer	✓
Pressing Profile +Set Screws	✓


System zur Befestigung auf dem Boden
Système Economique de connexion Au Dessus Du Sol

Glass Adapter



AK-5146
Glass Fixing Accessory
Glas Befestigungszubehör
Accessoire de fixage de verre

Top Rail




Code: PR-5148
On-Glass Profile
Handläufe
De Profilés sur verre



PR-5148T



AK-7116F



PR-7116

Endcap




S40-6981K





S40E

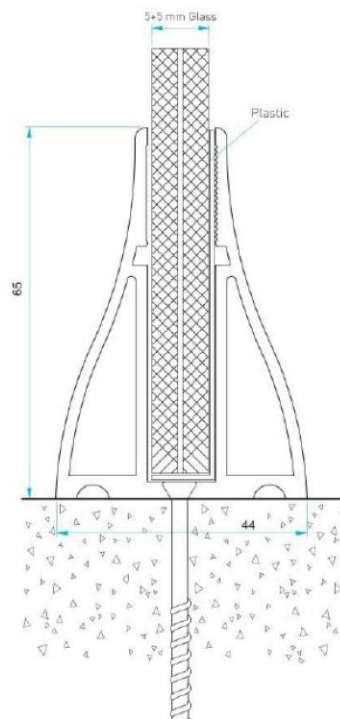

S40E

Full Length Base Channel Profiles

System zur Befestigung auf dem Boden
Système Economique de connexion Au Dessus Du Sol




P-1082
1,526 Kg/m




P-AL8735
1,626 Kg/m


Top Rail



P-AL5148
1,270 Kg/m
On-Glass Profile
Handläufe
De Profils sur verre



P-AL5148T



P-AL7116
1,60 Kg/m




AK-7116F

Endcap





S40E-1082K



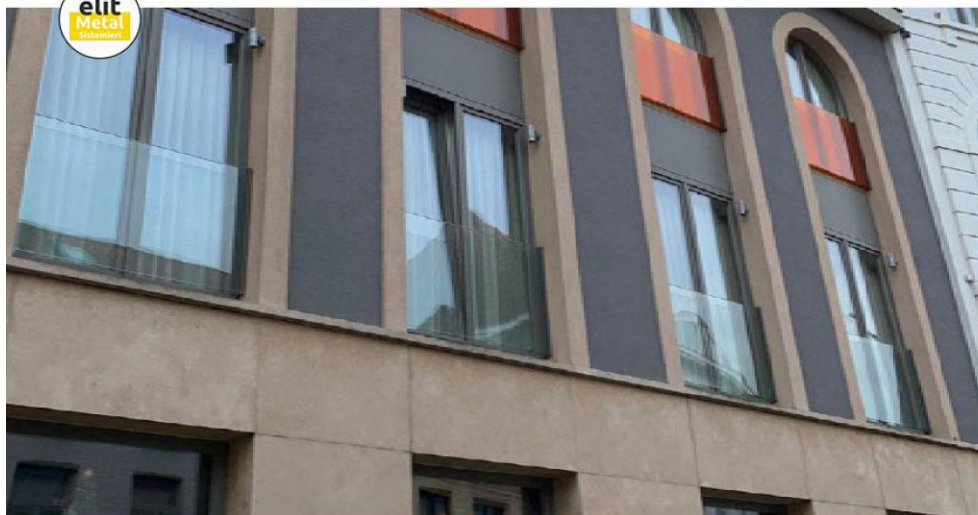

J100

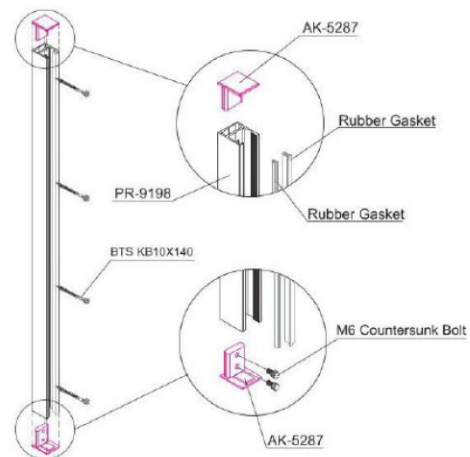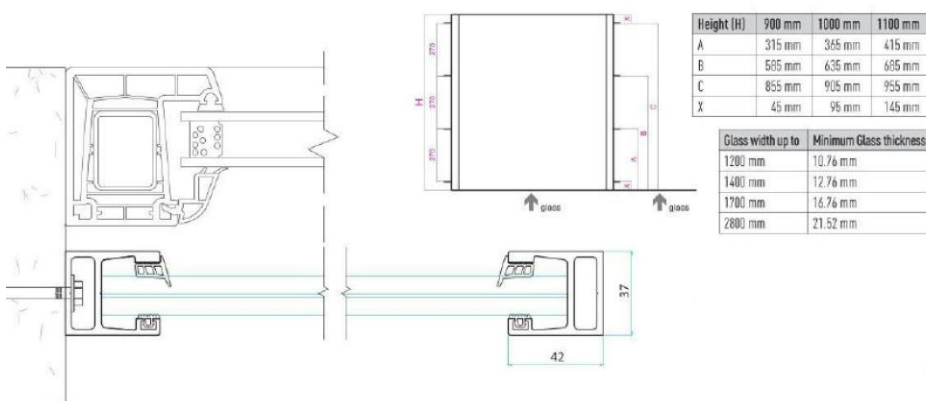

Balcon À la Française / Französischer Balkon

PRE SIZED READY KITS

Finish	Anodized (Matt Natural)		
Height	900 mm	1000 mm	1100 mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5 mm	J100.90.10.1	J100.100.10.1	J100.110.10.1
16.7 - 17.5 mm	J100.90.10.2	J100.100.10.2	J100.110.10.2
20 - 21.5 mm	J100.90.10.3	J100.100.10.3	J100.110.10.3

Finish	RAL (Anthracite Gray)		
Height	900 mm	1000 mm	1100 mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5 mm	J100.90.20.1	J100.100.20.1	J100.110.20.1
16.7 - 17.5 mm	J100.90.20.2	J100.100.20.2	J100.110.20.2
20 - 21.5 mm	J100.90.20.3	J100.100.20.3	J100.110.20.3

Finish	RAL (White)		
Height	900 mm	1000 mm	1100 mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5 mm	J100.90.22.1	J100.100.22.1	J100.110.22.1
16.7 - 17.5 mm	J100.90.22.2	J100.100.22.2	J100.110.22.2
20 - 21.5 mm	J100.90.22.3	J100.100.22.3	J100.110.22.3

Finish	Mill Finish		
Height	900 mm	1000 mm	1100 mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5 mm	J100.90.30.1	J100.100.30.1	J100.110.30.1
16.7 - 17.5 mm	J100.90.30.2	J100.100.30.2	J100.110.30.2
20 - 21.5 mm	J100.90.30.3	J100.100.30.3	J100.110.30.3

Do It Yourself




Outer Rubber Gaskets





Inner Rubber Gaskets




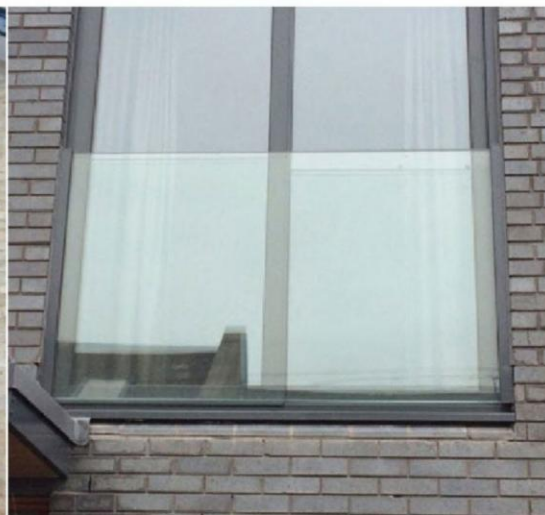

J120

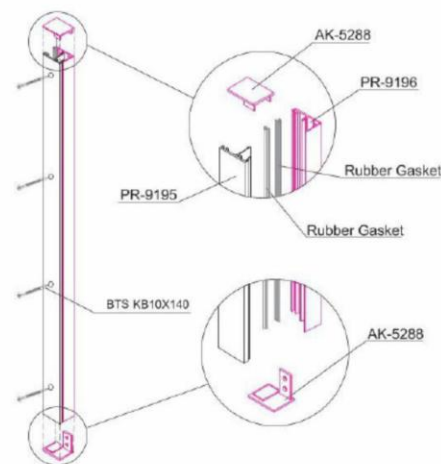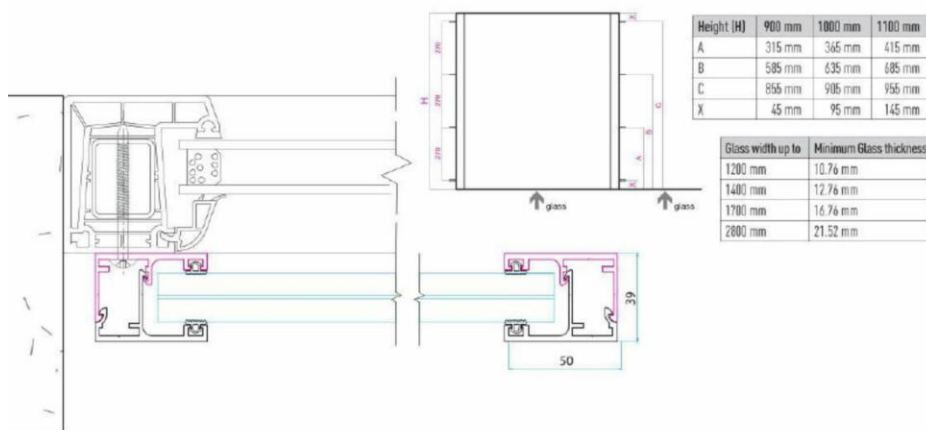

Do It Yourself

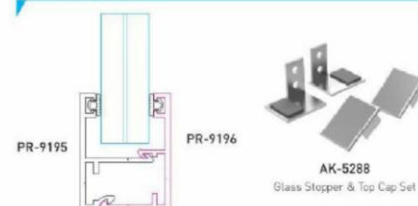

Balcon À la Française / Französischer Balkon

PRE SIZED READY KITS

Finish	Anodized (Matt Natural)		
Height	900mm	1000mm	1100mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5mm	J120.90.10.1	J120.100.10.1	J120.110.10.1
16.7 - 17.5mm	J120.90.10.2	J120.100.10.2	J120.110.10.2
20 - 21.5mm	J120.90.10.3	J120.100.10.3	J120.110.10.3

Finish	RAL (Anthracite Gray)		
Height	900mm	1000mm	1100mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5mm	J120.90.20.1	J120.100.20.1	J120.110.20.1
16.7 - 17.5mm	J120.90.20.2	J120.100.20.2	J120.110.20.2
20 - 21.5mm	J120.90.20.3	J120.100.20.3	J120.110.20.3

Finish	RAL (White)		
Height	900mm	1000mm	1100mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5mm	J120.90.22.1	J120.100.22.1	J120.110.22.1
16.7 - 17.5mm	J120.90.22.2	J120.100.22.2	J120.110.22.2
20 - 21.5mm	J120.90.22.3	J120.100.22.3	J120.110.22.3

Finish	Mill Finish		
Height	900mm	1000mm	1100mm
Rubber Set for Glass	Code	Code	Code
10.7 - 13.5mm	J120.90.30.1	J120.100.30.1	J120.110.30.1
16.7 - 17.5mm	J120.90.30.2	J120.100.30.2	J120.110.30.2
20 - 21.5mm	J120.90.30.3	J120.100.30.3	J120.110.30.3

Rubber Gaskets





Vista100



Vista100

Square Standoff Glass Holder

Seitliches Glas Befestigungssystem
Système de Connexion Latérale




V100



VJ10X140
Universal Anchor

- Aesthetic Design
- Easy Installation
- Unlimited View
- Cost Effective
- Ästhetisches Design
- Einfache Montage
- Freie Sicht
- Kosteneffizient
- Design esthétique
- Installation facile
- Vue illimitée
- Coût efficace


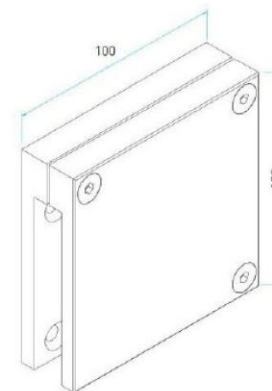




Vista300



V300

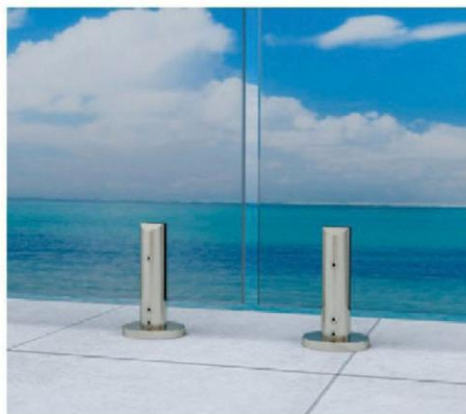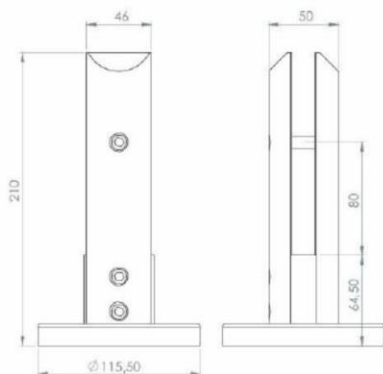


Zapfensystem / Systèmes Spigot




Vista310



V310



V310 Max

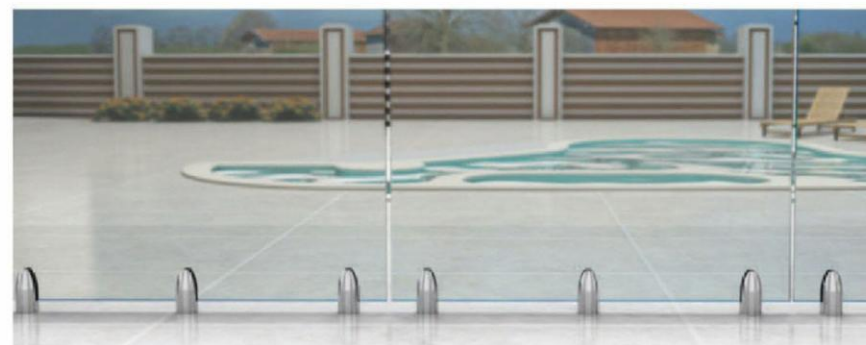




Vista320



V320

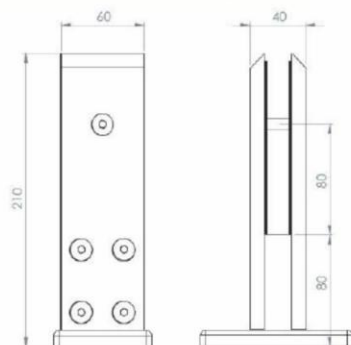

Zapfensystem / Systèmes Spigot




Vista330



V330



V330 Max





Handläufe / Types de Profils Sur Verre

On glass profile for 12 mm safety glass with gasket inside
12 mm Glas (mit Dichtung)
Verre de 12 mm avec joint

On glass profile for 16 mm safety glass with gasket inside
16 mm Glas (mit Dichtung)
Verre de 16 mm avec joint


On glass profile for 20 mm safety glass with gasket inside
20 mm Glas (mit Dichtung)
Verre de 20 mm avec joint



PR-6948/12



PR-6948



PR-6948/20



PR-6423/12



PR-6423




PR-6423/20



PR-7271/12



PR-7271




PR-7271/20



PR-9183/12



PR-9183



PR-9183/20



PR-6539/12



PR-6539



PR-6539/20



PR-6832/12



PR-6832



PR-6832/20



PR-6540/12



PR-6540



PR-6540/20



PR-7426




PR-6728




PR-6936

Various Top Rail Options




PR-6528



PR-7979




PR-7915




PR-7798



PR-5749



PR-5148



PR-7800

Zubehör für Handläufe / Accessoires de profil Sur Verre



AK-6948D



AK-6948B



AK-6948F



AK-6948TA



AK-6423F



AK-6423B



AK-6423D



AK-6423TS



AK-7271B



AK-7271D



AK-7271TA



AK-7271F



AK-9183F



AK-9183D



AK-9183B



AK-9183TA



AK-6539F



AK-6539D



AK-6539B



AK-6539TA



AK-6539C



AK-6832F



AK-6832B



AK-6832D



AK-6832T



AK-6540TA



AK-6540F



AK-6540V



AK-6540H



AK-6540KD



AK-6540KDI



AK-6540B



AK-6540T



AK-6540C



AK-6728F



AK-6728D1
90° Corner




AK-6728D2
135° Corner




PR-6425



PR-6424




PR-6413



PR-5900



PR-7304



PR-8092



PR-8052



PR-8093





SLIM MODEL



SQUARE MODEL



ROUND MODEL



ROUND MODEL



ROUND MODEL



HANDRAILS



AK-8788A



AK-8788D



AK-8788B



AK-8788TA



AK-8788DV



AK-5192



AK-5165



AK-5111



AK-5104



AK-5093



AK-5251



AK-5017A



AK-5067



AK-50320



AK-5090



AK-5020NX



AK-5162



AK-5007



AK-5009



AK-5037/30

MIDDLE GLASS SUPPORT

ROUND



AK-5146

SQUARE



AK-5072

Accessoires





Installation Tools Installationswerkzeug / Outils d'installation



AK-5076
Glass Section Lifter
Glas Saugnapf
Verre ventouse



AK-5027T
Chemical Silicon and Plug Pistol
Silikon Pistole
Silicone pistolet



AK-5027P
Air Pump
Luftpumpe
Pompe à air



AK5027K
Chemical Anchor
Epoxy Kleber
Glue chimique



AK-5077
Silicon
Silikon
Silicone



AK-5078
Coating Spray for Aluminium Surfaces
Reinigungsspray für Aluminium Oberflächen
Pulvérisation de revêtement pour surface d'aluminium



AK-5027D
Adhesive for Aluminium
Aluminium Kleber
Adhésif pour Aluminium



AK-5079
Cutting Machine
Säge
Scie



AK-5079T
Saw
Säge
Scie



AK-5299
Wedge Fixing Tool



AK-5008DC3A
C Spanner
Befestigungsschlüssel
Etrier de serrage

Standards stay the same, innovation never ends...

elit Metal
Sistemleri
EXPERT ON RAILING SYSTEMS